

Wall Fans - Internal and External

Internal Wall fans are designed to move air efficiently over long distances with the centrifugal fan providing quiet operation.

External wall fans are designed for use in residential and light commercial applications where a high performance, low noise solution is required. Three speed models enable further flexibility in a variety of applications. Specific applications include apartments where space is limited. 2 year warranty

Internal - Standard

Classic Standard Profile Rectangular Fascia	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Model	Order Code
					(l/s)	(m³/hr)					
	100	Centrifugal	45	120	31	110	1.45	45	Standard	CF200S	FAN0041

External - Supply Air

Classic	Duct (mm)	Fan Type	Scroll Dia. (mm)	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Model	Order Code
						(l/s)	(m³/hr)					
	150	Axial	-	48	80	73	263	0.66	48	Standard	WF150AX	FAN7015

External - Standard

Classic	Duct (mm)	Fan Type	Scroll Dia. (mm)	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Model	Order Code
						(l/s)	(m³/hr)					
	150	Axial	-	48	80	73	263	0.66	48	Standard	WF150AX	FAN2303
		Centrifugal	190	65	280	109	392	0.60	60	Standard	WF150C190	FAN2301
			220	96	380	118	423	0.81	61	Standard	WF150C220	FAN2302

External - 3 Speed

Classic	Duct (mm)	Fan Type & Speed	Scroll Dia. (mm)	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Switching	Model	Order Code
						(l/s)	(m³/hr)					
	150	Centrifugal High Medium Slow	190	65	280	113	408	0.58	60	Standard	WF150C190-3	FAN2316
				57	250	94	340	0.61	56			
				55	200	77	277	0.71	46			
		Centrifugal High Medium Slow	220	96	380	136	493	0.71	61	Standard	WF150C220-3	FAN2317
				69	340	113	408	0.61	56			
				60	280	94	340	0.64	50			


Note: Installed system performance is always influenced by duct length and layout

Switching Options: **Standard** - Remote switch (not supplied).

Wall Fans - Internal and External

Dimensions (mm)

Model	A	B	C	D	E	F	G
CF200	65	260	185	135	90	45	98
WF150	305	110	369			-	

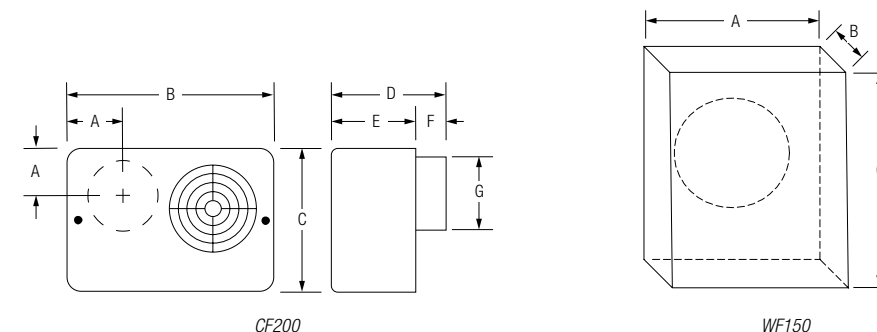

Technical

Model	CF200	WF150
Supply	220-240V AC, 50Hz	
Sound Level	45 dB(A)	
Max. Operating Temp	50°C	40°C
IP Rating	IPX4	IPX3

