


## PD-C 360/24 Slave

**Item number**      **GTIN**  
 EP10055386      4015120055386

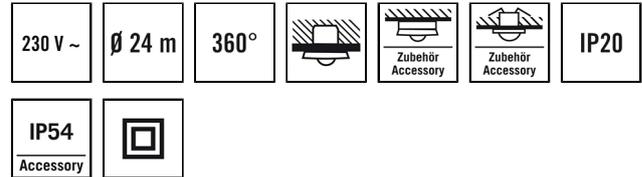

### Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Remote controllable	–
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Recessed mounting / device box (Ø 68 mm)
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, Ø 60 mm
Type of connection	Push terminal
Connectable wire cross section	1,50 – 2,50 mm <sup>2</sup>
HOUSING	
Dimensions	Height/Depth 70 mm, Ø 108 mm
Weight	11,6 g
Material	UV-stabilised polycarbonate
Protection type	recessed-mounted IP20, IP20/IP54 with surface-mounted box (order separately), IP20 as recessed ceiling-mounted version (order installation set separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010

### ELECTRICAL VERSION

### Product description

- "Slave" presence detector for extending the field of detection of a "master" presence detector with **360° field of detection** for ceiling mounting
- **range of up to 24 m** in diameter as a cost efficient system upgrade with up to 10 additional extensions
- Ideal for use in **areas with ceilings of up to 10 m**, such as sports halls, warehouses etc.
- Connection of the "Slave" detector to many presence detectors of the PD-C series possible

Control system	ON/OFF
Protection class	II
Nominal voltage	230 V AC / 50 Hz
Power consumption	0,3 W

### SENSORS

Detection angle	360°
Detection range diagonally	Ø 24 m
Detection range head-on	Ø 11 m
Detection range presence	Ø 8 m
Field of detection	up to 453 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	none

### CHANNELS (LIGHTING / HVAC)

Push button input HVAC	–
Slave input	✓
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	–
Channel	<b>C1</b> Lighting
Function	Not relevant
Switch contact	Bus system
Push button input	–
Impulse feature	–


## PD-C 360/24 Slave

Item number	GTIN
EP10055386	4015120055386


### Accessories

Product designation	GTIN
<b>Cover</b>	
COMPACT COVER SET 24/32 SR	4015120425431
COMPACT COVER SET 24/32 BK	4015120007491
<b>Mounting</b>	
COMPACT MOUNTING BOX IP20 SM WH	4015120425370
COMPACT MOUNTING BOX IP20 SM SR	4015120425387
COMPACT MOUNTING BOX IP54 SM WH	4015120425905
COMPACT MOUNTING BOX IP54 SM SR	4015120425912
MOUNTING SET IP20 FM 62 WH	4015120425929
COMPACT MOUNTING BOX IP54 SM BK	4015120426940
COMPACT MOUNTING BOX IP20 SM BK	4015120426933
<b>Protection</b>	
BASKET GUARD ROUND SMALL	4015120425615
BASKET GUARD ROUND LARGE	4015120425608

### Scale drawing



### Field of detections



### Detection range

Diagonally (A)	Ø 24 m
Frontal (B)	Ø 11 m
Presence area (C)	Ø 8 m

### Circuit diagram

