

Ceiling Extraction Fans – Centrifugal

Manrose EC CONTOUR fans deliver “24/7” Continuous trickle extract ventilation which has become the new standard for addressing poor air quality in new well-sealed homes. EC Contour Continuous **Bathroom** and **High Steam** fans have a comprehensive range of stylish, interchangeable fascia to choose from.

EC CONTOUR Bathroom Fan	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Order Code
					(l/s)	(m³/hr)					
	125	Centrifugal Continuous (24/7)	3	20	26	93	0.12	28	Range Selection	Standard	FAN7037
		Run	14	73	55	200	-	30			
		Boost	24	116	68	245	-	37			
EC CONTOUR High Steam Fan	Duct (mm)	Fan Type	Max. Fan Watts (W)	Max. Fan Pressure (Pa)	Free Air Fan Performance		Specific Fan Power (W/l/s)	Sound dB(A)	Fascia	Switching	Order Code
					(l/s)	(m³/hr)					
	150	Centrifugal Continuous (24/7)	3	33	39	140	0.08	21	Range Selection	Standard	FAN7038
		Run	25	270	121	434	-	40			
		Boost	80	323	142	510	-	44			


- 3 speed wireless wall controller included
- EC Contour Bathroom (FAN7037 only) with adapter to 125mm from 100mm fan spigot - supplied in kit
- Integrated backdraught shutter
- Deep spigot for easy duct connection
- Swing-out arms for easy installation

Fascia Selections

Fan	Round				Square			
	White	Black	LED White	LED Black	White	Black	LED White	LED Black
 + 								
Bathroom Fan	DCT4702	DCT4503	DCT4706	DCT4507	DCT4504	DCT4505	DCT4508	DCT4509
High Steam Fan	DCT4710	DCT4511	DCT4714	DCT4515	DCT4712	DCT4513	DCT4516	DCT4517

Ceiling Extraction Fans – Centrifugal


DIMENSIONS (mm)

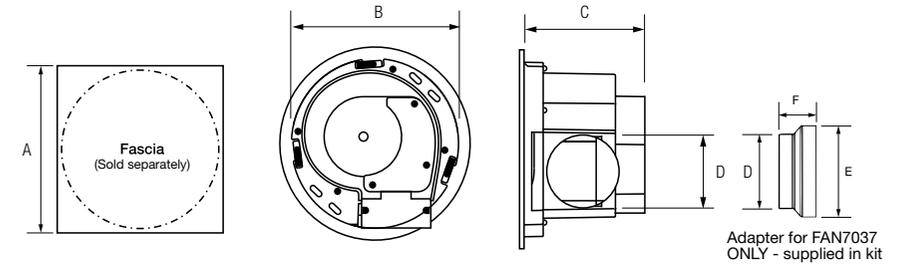


Model	A (fascia size)	B (cut-out size)	C	D	E x F
Bathroom	272	Ø240	170	Ø100	Ø123 x 50
High Steam Area	326	Ø300	200	Ø150	-

Technical

Model	Bathroom	High Steam Area
Supply	220-240V~50Hz	
Max. Operating Temp	40°C	
Tri-Colour LED Fascia - Round		
(W)	11	16
(lm)	932 / 1054 / 1046	1294 / 1446 / 1443
(K)	3000K / 4000K / 6000K	3000K / 4000K / 6000K
Tri-Colour LED Fascia - Square		
(W)	12	15
(lm)	1112 / 1197 / 1224	1488 / 1601 / 1641
(K)	3000K / 4000K / 6000K	3000K / 4000K / 6000K
IP Rating	IPX4	

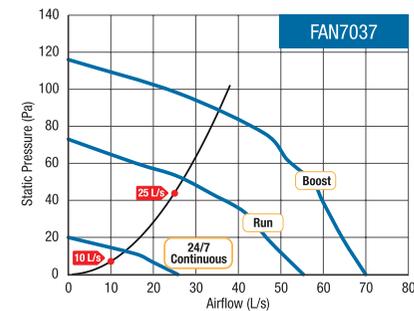

FAN7037 exceeds the NZ Green Building Council's Homestar v5 HC3 continuous extract ventilation standard and G4 Bathroom requirements for both Continuous and Intermittent rates when installed correctly with standard fascia, 100-125mm adapter, 125mm x 6m flexible duct, 1x 90° flexible duct bend, and soffit mounted 125mm fixed louvre grille.

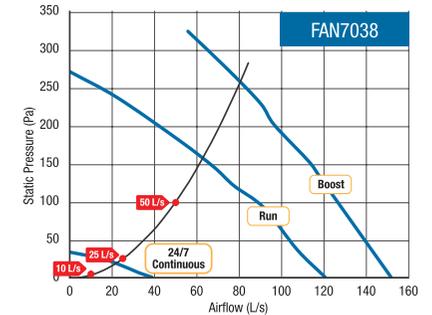

FAN7038 exceeds the NZ Green Building Council's Homestar v5 HC3 continuous extract ventilation standard and G4 Bathroom and Kitchen requirements for both Continuous and Intermittent rates when installed correctly with standard fascia, 150mm x 6m flexible duct, 1x 90° flexible duct bend, and soffit mounted 150mm fixed louvre grille.