



# SmartBright LED Oyster

## CL261 DS Oyster 22W 30-40-65K IP54 ANZ

The new Philips tri-colour Splashproof Oyster offers exceptional value. It is perfect for your everyday lighting installations. It comes with a 3 CCT selection switch to provide flexibility to the customer.

### Product data

General Information		Temperature	
Light source replaceable	No	Ambient temperature range	-20 to +40 °C
Lighting Technology	LED		
Light Technical		Controls and Dimming	
Luminous Flux	2,100 lm	Dimmable	Yes
Correlated Color Temperature (Nom)	3000 4000 6500 K		
Luminous Efficacy (rated) (Nom)	95.00 lm/W	Mechanical and Housing	
Color rendering index (CRI)	80	Housing Material	Metal-Plastic
Light source color	3000/4000/6500	Housing Color	White
Luminaire light beam spread	110°	Overall length	87 mm
		Overall width	87 mm
		Overall height	87 mm
		Overall diameter	400 mm
		Dimensions (Height x Width x Depth)	87 x 87 x 87 mm
Operating and Electrical		Approval and Application	
Input Voltage	220 to 240 V	Ingress protection code	IP54 [Dust accumulation-protected, splash-proof]
Line Frequency	50 or 60 Hz	Mech. impact protection code	IK03 [0.3 J]
Input Frequency	50 or 60 Hz	Protection class IEC	Safety class I
Power Consumption	22 W		
Power Factor (Fraction)	0.9		

# SmartBright LED Oyster

## Over Time Performance (IEC Compliant)


Median useful life L70B50 30,000 h

## Product Data


Order product name	CL261 DS Oyster 22W 30-40-65K IP54 ANZ
Full product name	CL261 DS Oyster 22W 30-40-65K IP54 ANZ
Full product code	871951426679700
Local code description	CL261RD22WIP
Order code	929002562319

Material Nr. (12NC)	929002562319
Local order code	CL261RD22WIP
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514266797
Numerator - Packs per outer box	5
EAN/UPC - Case	8719514266803

## Dimensional drawing



## Photometric data





© 2023 Philips Lighting B.V. Page 11

General uniform lighting - CL261 DS Oyster 22W 30-40-65K IP54 ANZ

# SmartBright LED Oyster

## Lifetime

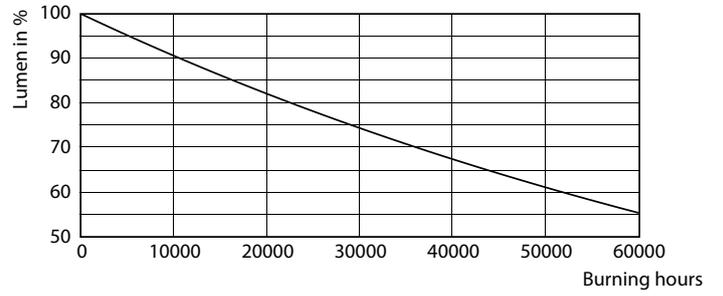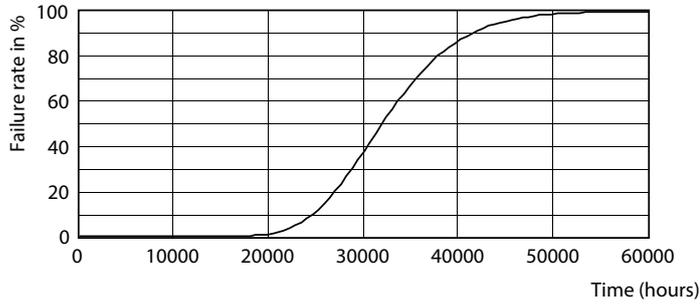

Life Expectancy Diagram - CL261 DS Oyster 22W 30-40-65K IP54 ANZ

Lumen Maintenance Diagram - CL261 DS Oyster 22W 30-40-65K IP54 ANZ

