

CORELINE WATERPROOF EMERGENCY BATTEN



PRODUCT DETAILS



- Size: 5ft/1500mm, 4ft/1200mm
- Lumen maintenance: L85 B50 50,000hrs/L70 B50 75,000hrs
- LED: 4000K, CRI80, 3SDCM
- Beam angle: Symmetrical, 114°
- Driver: Integral, Fixed output (PSU)
- Flicker free: PstLM ≤ 1, SVM ≤ 0.4
- Emergency: Maintained or Non-maintained, Manual test, Replaceable lithium iron phosphate (LiFePO4) battery
- Rating: IP65, IK08, Class I
- Operating temperature: 0°C to +40°C
- Housing: Polycarbonate (PC), UV resistance
- Finishing: Grey
- Diffuser/Lens: Polycarbonate (PC), UV resistance, Frosted
- Connection: Large terminal block, End feed
- Compliant: AS/NZS 2293
- Warranty: 5 year on fixture, 4 year on battery

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

6500K

APPLICATIONS

Surface mounted or suspended using separate suspension kit, Internal Manufacturing, Warehousing, Car parks

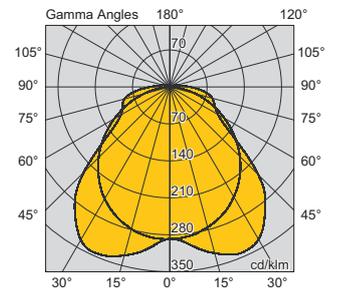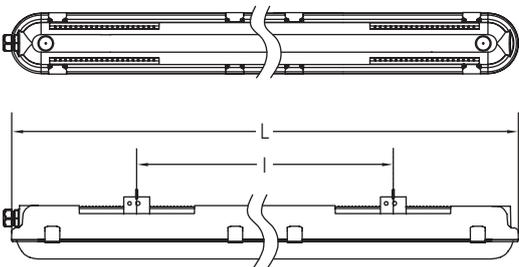

SYMMETRICAL 114°

VERSION	I	L	W	H
5FT/1500MM	838-1362MM	1515MM	80MM	76MM
4FT/1200MM	538-1062MM	1215MM	80MM	76MM

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
919023001448	WT198C LED60S/840 PSU EM L1500	50W 1.83W (EM)	6000LM 332LM (EM)	120LM/W 181LM/W (EM)	1.8KG
919023001449	WT198C LED80S/840 PSU EM L1500	66W 1.83W (EM)	8000LM 332LM (EM)	121LM/W 181LM/W (EM)	1.8KG
919023001447	WT198C LED40S/840 PSU EM L1200	35W 1.83W (EM)	4000LM 332LM (EM)	114LM/W 181LM/W (EM)	1.4KG

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.