

CORELINE EMERGENCY BATTEN





PRODUCT DETAILS

- Size: 5ft/1500mm, 4ft/1200mm
- Lumen maintenance: L70 50,000hrs
- LED: 4000K, CRI80, 3SDCM
- Beam angle: Symmetrical, 120°
- Driver: Integral, Fixed output
- Emergency: Maintained or Non-maintained, Manual test, Replaceable lithium iron phosphate (LiFeP04) battery
- Rating: IP20, IK04, Class I
- Operating temperature: 0°C to +40°C
- Housing: Steel
- Finishing: White RAL9003, Powder coated
- Diffuser/Lens: Polycarbonate (PC), Opal
- Connection: Large terminal block, Central or end feed
- Compliant: AS/NZS 2293
- Warranty: 5 year on fixture, 4 year on battery

APPLICATIONS

Surface mounted or suspended using separate suspension kit, Internal General area lighting

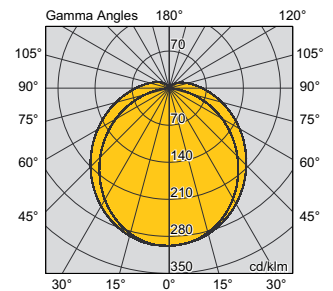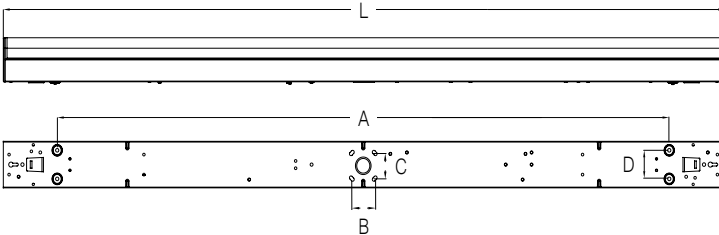

SYMMETRICAL 120°

VERSION	L (MM)	W (MM)	H (MM)	A (MM)	B (MM)	C (MM)	D (MM)
5FT/1500MM	1450	65	65	972	36	36	40
4FT/1200MM	1135	65	65	960	36	36	40

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
919023001454	BN126C LED60S/840 PSU EM L1500 CL	46W 2W (EM)	6000LM 300LM (EM)	130LM/W 150LM/W (EM)	1.75KG
919023001456	BN126C LED60S/865 PSU EM L1500	46W 2W (EM)	6000LM 300LM (EM)	130LM/W 150LM/W (EM)	1.75KG
919023001453	BN126C LED41S/840 PSU EM L1200 CL	31W 2W (EM)	4100LM 300LM (EM)	132LM/W 150LM/W (EM)	1.45KG
919023001455	BN126C LED41S/865 PSU EM L1200	31W 2W (EM)	4100LM 300LM (EM)	132LM/W 150LM/W (EM)	1.45KG

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.