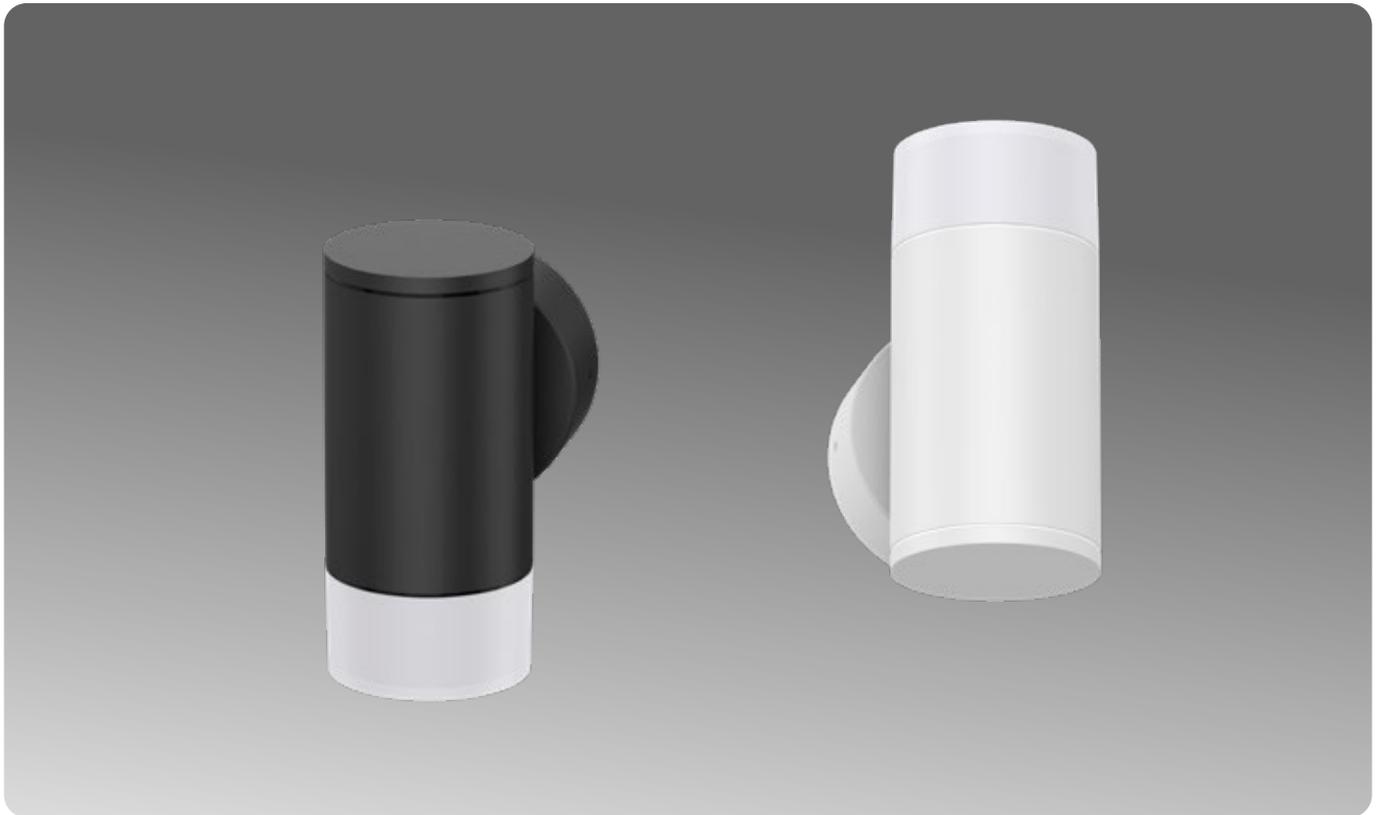


EX132

LEDE

Surface Mount Column Spot
LEDE One Way Up or Down Select 3K/4K

SPECIFICATIONS


DIMENSIONS	Overall: L161 x W95 x D116mm Spot: D76mm x H161mm Base: D95mm
COLOUR TEMP	Selectable 3000K Warm White or 4000K Natural White
LUMENS	3000K Warm White / 570lm 4000K Natural White / 650lm
CRI	80
LIFESPAN	>54,000 hours (L80)
BEAM ANGLE	170°
MATERIAL	Aluminium, PC
IP RATING	IP65
DRIVER	Dimmable driver incorporated
ELECTRICAL CLASS	Class I luminaire, requires earth.
APPLICATION	Exterior Residential and Commercial, suitable for use in both upwards or downwards orientation. Install with pride, ensure cable entry gland is adequately sealed with silicone.
WARRANTY	5 Year Warranty

<650
LUMENS8
WATTSAC
240V

select CCT

AVAILABLE IN

DESCRIPTION	CODE
Black, "Select" 3000K/4000K	EX132 B34
White, "Select" 3000K/4000K	EX132 W34



HALCYON