


# Exterior Recessed Multi-Use Eyelid

X56

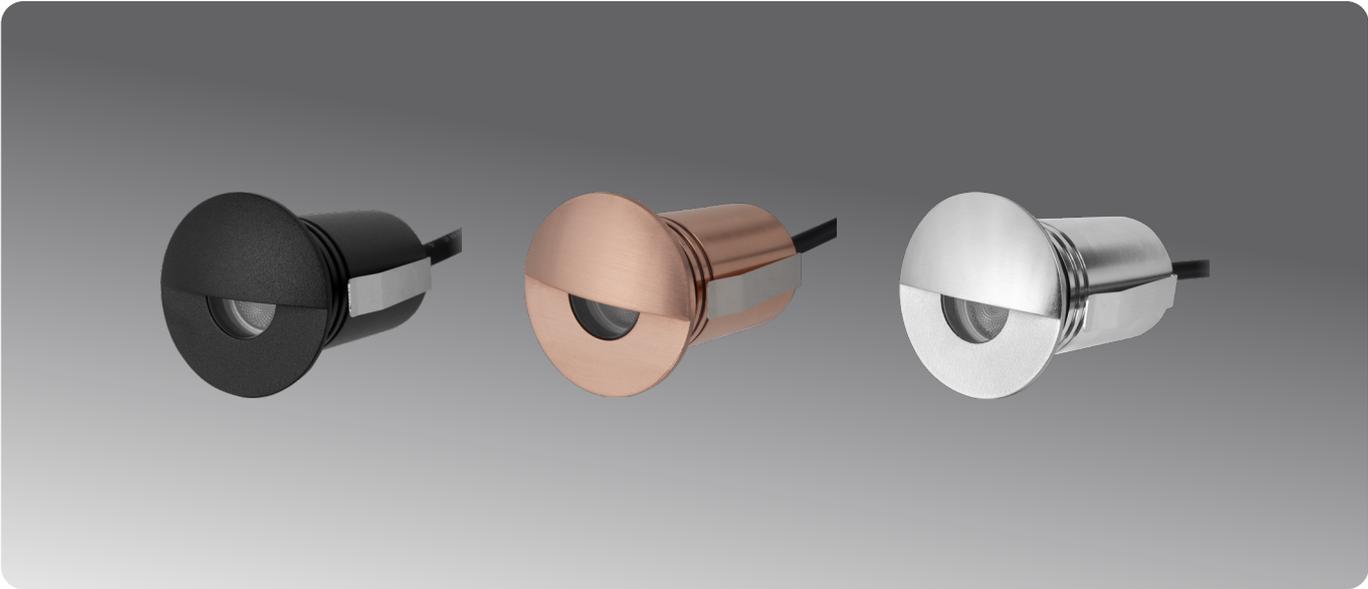

## SPECIFICATIONS

<b>DIMENSIONS</b>	D55 x H90mm
<b>CUT OUT</b>	Ø43mm
<b>COLOUR TEMP</b>	2700K, 3000K, 4000K or RGBW
<b>CRI</b>	>80
<b>LIFESPAN</b>	40,000hrs (L80 B10)
<b>BEAM ANGLE</b>	19°, 36° or 60°
<b>MATERIAL</b>	316 Stainless Steel or Copper
<b>IP RATING</b>	IP67
<b>IK RATING</b>	IK10
<b>CLASSIFICATION</b>	IC-F Rated
<b>CLEARANCE</b>	0mm, zero clearance required
<b>DRIVER</b>	Sold separately. Dimmable (24V CV), Non-dimmable (8-25V CV)
<b>DIMMABLE</b>	Dimmable option available (24V DC)
<b>APPLICATION</b>	Exterior and interior multi-use
<b>WEIGHT CAPACITY</b>	<2000kg
<b>COMPLETE WITH</b>	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/sockets. RGBW not compatible with quick connect accessories.
<b>WARRANTY</b>	5 Year Warranty

Non-dimmable 2700K, 3000K, 4000K

<b>90 LUMENS</b>	<b>2.5 WATTS</b>	<b>8-25V PARALLEL</b>
------------------	------------------	-----------------------

Dimmable 2700K, 3000K, 4000K

<b>90 LUMENS</b>	<b>2.5 WATTS</b>	<b>24V PARALLEL</b>
------------------	------------------	---------------------

RGBW

<b>2.5 WATTS</b>	<b>24V PARALLEL</b>
------------------	---------------------



Driver sold separately, specify when ordering.


## ACCESSORIES

Installation housings, feed cables, loop/extension cables, two way and three way spot sockets available. See accessories page for further details.

## AVAILABLE IN

Example code = **X56-ST53K-36D** (Eyelid, 316 STS, 3000K, 36° beam).


Model	Finish	Colour Temp	Dimmable	Beam Angle
X56 (Eyelid)	B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	D = Dimmable	19D = 19° beam 36D = 36° beam 60D = 60° beam

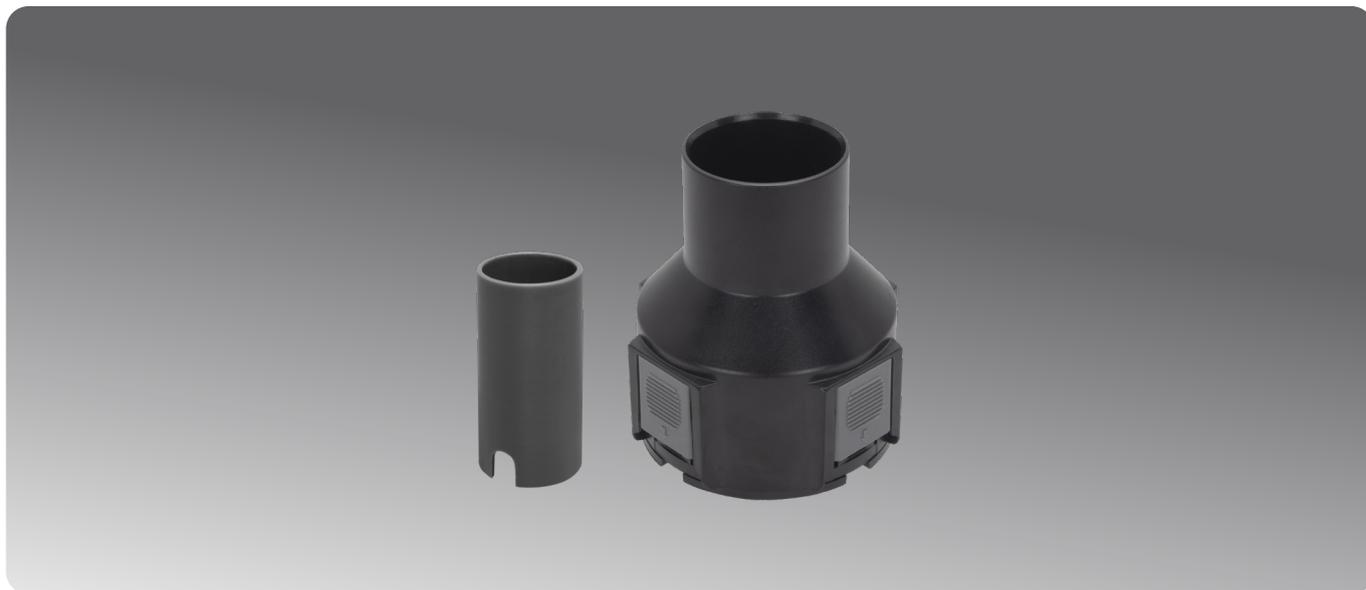

### WIRING ACCESSORIES

Suitable for Single Colour fittings only, not compatible with RGBW

DESCRIPTION	X25-X32 CODE	X55-X62 CODE
1m Feed Cable	X25-FC1M	EX110 FC1M
10m Feed Cable	X25-FC10M	EX110 FC10M
1.5m Loop/Extension Cable	X25-LC1.5M	EX110 LC1.5M
2m Loop/Extension Cable	-	EX110 LC2M
3m Loop/Extension Cable	X25-LC3M	EX110 LC3M
5m Loop/Extension Cable	X25-LC5M	EX110 LC5M
10m Loop/Extension Cable	X25-LC10M	EX110 LC10M
Two Way Spot Socket	X25-S2	EX110 S2
Three Way Spot Socket	X25-S3	EX110 S3

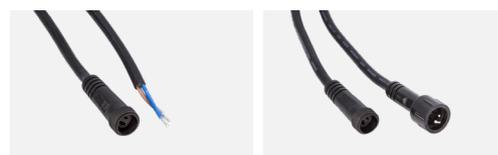

Feed Cable

Loop/extension Cable




EX110 S2

EX110 S3

### HOUSING ACCESSORIES

DESCRIPTION	DIMENSIONS	CODE
X25-X32 In-wall Installation Sleeve	D22 x H50mm Cut out: Ø23mm	X25-IWS
X55-X62 In-wall Installation Sleeve	D47 x H95mm Cut out: Ø48mm	X55-IWS
X55-X62 Inground Installation Housing	D88 x H97mm Cut out: Ø90mm	X55-IGH

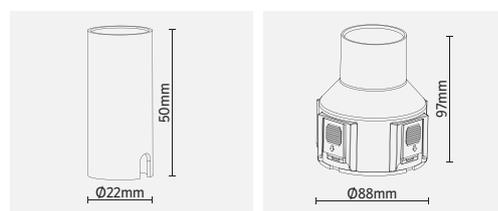

X25-IWS

X55-IGH