



SPECIFICATIONS

DIMENSIONS	D55 x H90mm
CUT OUT	Ø43mm
COLOUR TEMP	2700K, 3000K, 4000K or RGBW
LUMENS	Ambient light source
CRI	>80
LIFESPAN	40,000hrs (L80 B10)
MATERIAL	316 Stainless Steel or Copper
IP RATING	IP67
IK RATING	IK10
CLASSIFICATION	IC-F Rated
CLEARANCE	0mm, zero clearance required
DRIVER	Sold separately. Dimmable (24V CV), Non-dimmable (8-25V CV)
DIMMABLE	Dimmable option available (24V DC)
APPLICATION	Exterior and interior multi-use
WEIGHT CAPACITY	<2000kg
COMPLETE WITH	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/sockets. RGBW not compatible with quick connect accessories.
WARRANTY	5 Year Warranty


Non-dimmable 2700K, 3000K, 4000K



Dimmable 2700K, 3000K, 4000K



RGBW



Driver sold separately, specify when ordering.


ACCESSORIES

Installation housings, feed cables, loop/extension cables, two way and three way spot sockets available. See accessories page for further details.

AVAILABLE IN

Example code = **X58-ST53K-D** (Two-way, 316 STS, 3000K, dimmable).


Model	-	Finish	Colour Temp	-	Dimmable
X57 (One-way)	-	B = Black	27K = 2700K	-	D = Dimmable
X58 (Two-way)	-	COP = Copper	3K = 3000K		
X59 (Three-way)		STS = 316 Stainless Steel	4K = 4000K		
X60 (Four-way)			RGBW = RGB + 3000K		

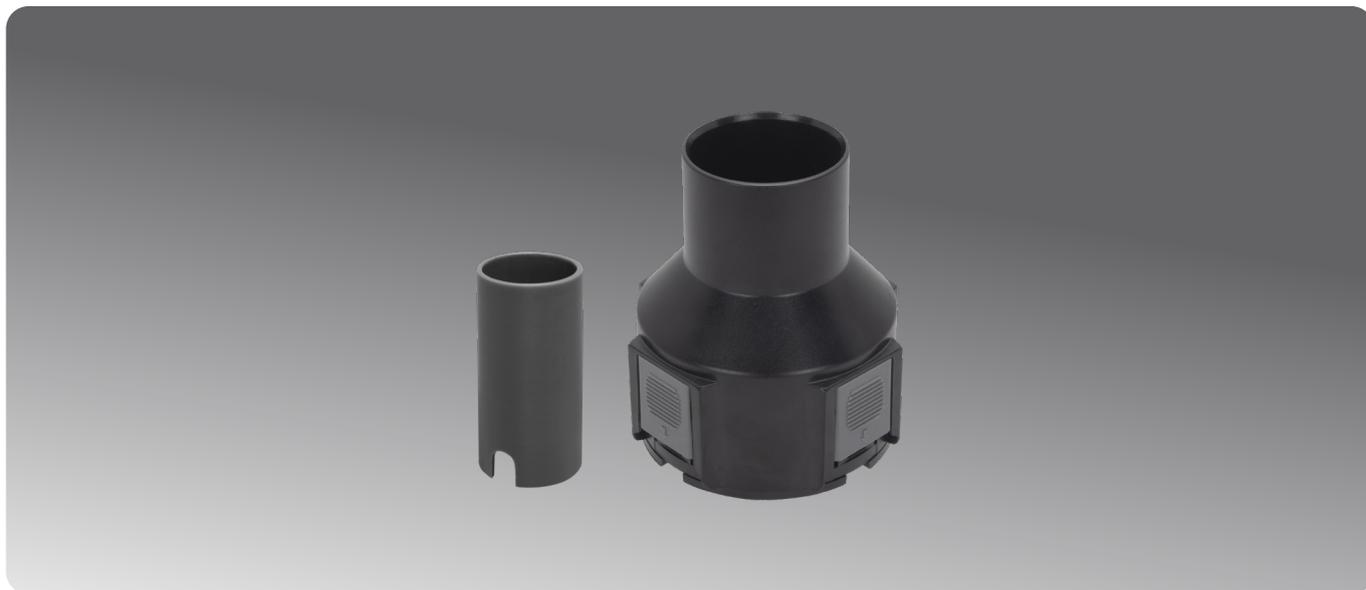

WIRING ACCESSORIES

Suitable for Single Colour fittings only, not compatible with RGBW

DESCRIPTION	X25-X32 CODE	X55-X62 CODE
1m Feed Cable	X25-FC1M	EX110 FC1M
10m Feed Cable	X25-FC10M	EX110 FC10M
1.5m Loop/Extension Cable	X25-LC1.5M	EX110 LC1.5M
2m Loop/Extension Cable	-	EX110 LC2M
3m Loop/Extension Cable	X25-LC3M	EX110 LC3M
5m Loop/Extension Cable	X25-LC5M	EX110 LC5M
10m Loop/Extension Cable	X25-LC10M	EX110 LC10M
Two Way Spot Socket	X25-S2	EX110 S2
Three Way Spot Socket	X25-S3	EX110 S3

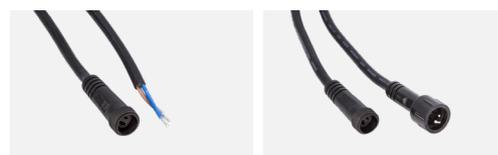

Feed Cable

Loop/extension Cable




EX110 S2

EX110 S3

HOUSING ACCESSORIES

DESCRIPTION	DIMENSIONS	CODE
X25-X32 In-wall Installation Sleeve	D22 x H50mm Cut out: Ø23mm	X25-IWS
X55-X62 In-wall Installation Sleeve	D47 x H95mm Cut out: Ø48mm	X55-IWS
X55-X62 Inground Installation Housing	D88 x H97mm Cut out: Ø90mm	X55-IGH

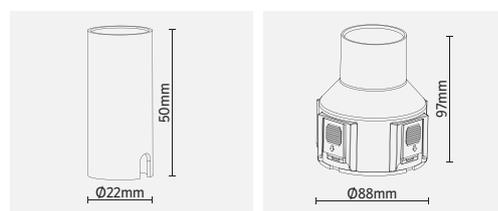

X25-IWS

X55-IGH