



LED444

4ft

Watts Selectable 29W, 36W, 42W or 50W


Lumens <6125lm

LED445

5ft

Watts Selectable 37W, 46W, 56W or 70W

Lumens <8225lm

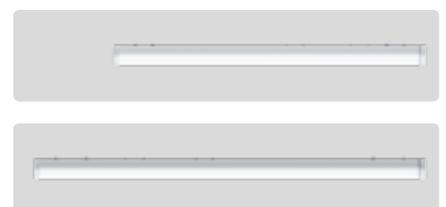

Specifications

Input	240V AC
Dimensions	W163 x H82mm. LED444: L1200mm, LED445: L1500mm
Colour Temp	Selectable 4000K or 6000K
CRI	90
Lifespan	72,000hrs (L80 B10)
Beam	120°
Binning	SDCM 3
Material	PC, SPCC
IP Rating	IP54
Termination	Central rear termination as standard, knockouts at both ends for alternative installation methods
Driver	Incorporated, Standard, XL Terminals
Dimming/Control	Adjustable Output Non-dimmable
TLAs	"Flicker-free", PstLM ≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Interior
Power Factor	0.9
Ambient Temp	-20..+40°C
Weight	LED444: 2350g, LED445: 2950g
Warranty	5 Year Warranty



White

Available In

Description	Code
LED444 - 4ft	
White	LED444-W46
LED445 - 5ft	
White	LED445-W46

Dimmable or Dali versions also available

Accessories

Description	Code
Suspension Kit (requires drilling and assembly)	LED444 SSK
Ceiling Rose White	EV CRW

Lumens

	CCT	29W	36W	42W	50W
LED444	4000K	3650lm	4420lm	5085lm	5925lm
	6000K	3775lm	4565lm	5275lm	6125lm
	CCT	37W	46W	56W	70W
LED445	4000K	4870lm	5870lm	6870lm	7920lm
	6000K	5000lm	6050lm	7150lm	8225lm