



**M60-T1** Type 1 - Dark Art Adjustable  
**Watts** 6.5W / 200mA DC **Lumens** 540lm  
**Beam** 55° **Tilt/Rotate** 20°/355°



**M60-T3** Type 3 - Dark Art Fixed  
**Watts** 9W / 260mA DC **Lumens** <750lm  
**Beam** 45°








**Specifications**

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

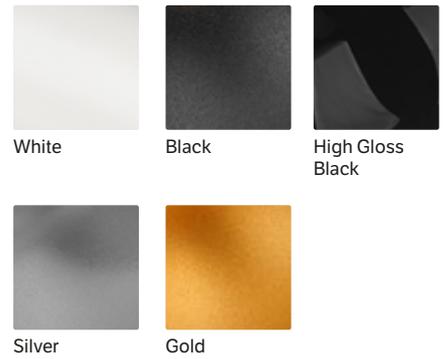

**Dimensions**

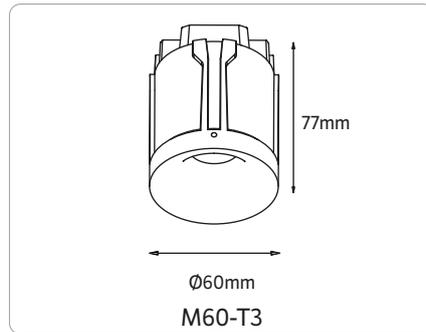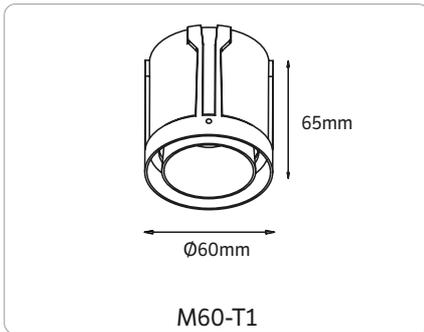

**Step 1: Choose Installation Frame**

See pages 166-167 for frame details



	<b>Recessed Round</b>	<b>Recessed Oval Double</b>	<b>Recessed Square</b>	<b>Recessed Rectangular Double</b>	<b>Trimless</b>	<b>Surface Cylinder</b>
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

**Step 2: Choose Module Type**

<b>Model - Type - Reflector Colour</b>	<b>CCT - Beam</b>
M60 - T1 - WW (White), BB (Black)	3K - 55D
M60 - T3 - W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K - 45D

**Step 3: Select your Driver**

	TRIAC Dimmable	Dali	Casambi
M60-T1	DCC120200-DMS-5W8W @ 200mA	DCC150700-DDM-612W @ 200mA	DCC150500-CAS-712W @ 180mA
M60-T3	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA

**Configuration Example:** For a Trimless Single M60-T1 Dark Art Adjustable in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F60-TL-R (2) Light Module: M60-T1-WW3K-55D (3) Dimmable Driver: DCC120200-DMS-5W8W.