



M60-T2

Type 2 - Lotus

Watts 9W / 260mA DC

Lumens 700lm

Beam 55°



M60 Type 2 with
Recessed Round Frame



M60 Type 2 with
Trimless Frame



M60-T11

Type 11 - Classico Fixed

Watts 9W / 260mA DC

Lumens 750lm

Beam 50°



M60 Type 11 with
Recessed Round Frame




M60 Type 11 with
Trimless Frame





Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

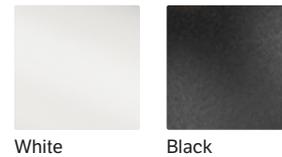

Dimensions

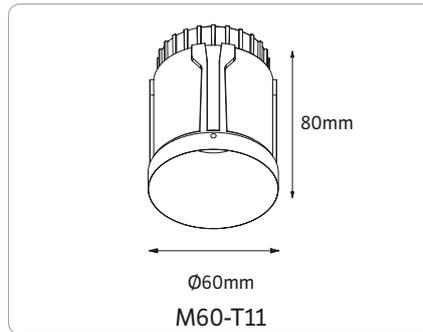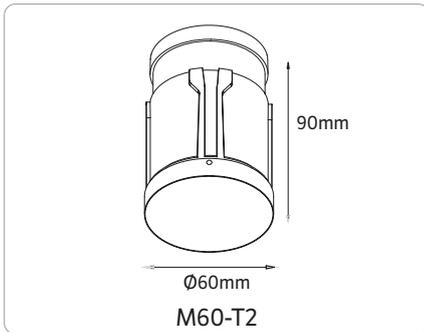

Step 1: Choose Installation Frame

See pages 166-167 for frame details



	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless	Surface Cylinder
Dimensions	Ø81 x H60mm	L153 x W81 x H60mm	L81 x W81 x H60mm	L153 x W81 x H60mm	Ø130xH58mm	Ø85xH130mm
Cut Out	Ø75mm	2x 75mm @ 72mm centres	Ø75mm	2x 75mm @ 72mm centres	Ø105mm	-
White Code	F60-RR-W	F60-RR2-W	F60-RSQ-W	F60-RSQ2-W	F60-TL-R	SF60-RR-W
Black Code	F60-RR-B	F60-RR2-B	F60-RSQ-B	F60-RSQ2-B		SF60-RR-B

Step 2: Choose Module Type

Model	Type	Reflector Colour	CCT	Beam
M60	T2	W (White), B (Black)	3K	55D
M60	T11	W (White), B (Black)	3K	50D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M60-T2	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA
M60-T11	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC150500-CAS-712W @ 260mA

Configuration Example: For a Recessed Single M60-T2 Lotus in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F60-RR-W (2) Light Module: M60-T2-W3K-55D (3) Dimmable Driver: DCC260-DX-12W.