




**M80-T7** Type 7 - Adjustable Highlighter  
**Watts** 9W / 260mA DC **Lumens** 650lm  
**Beam** 36° **Tilt** 30° **Rotate** 355°



**M80-T10** Type 10 - Wallwasher  
**Watts** 12W / 350mA DC **Lumens** <900lm  
**Beam** 40°

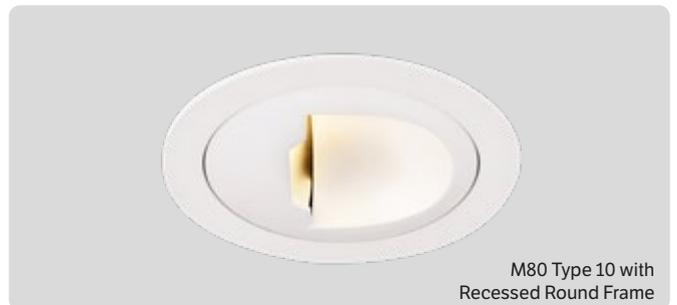






**Specifications**

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty




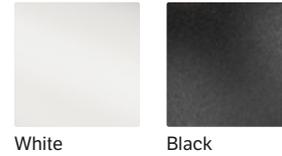


**Dimensions**

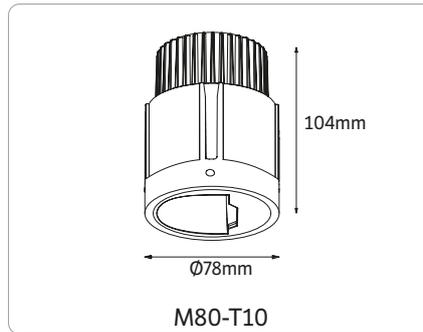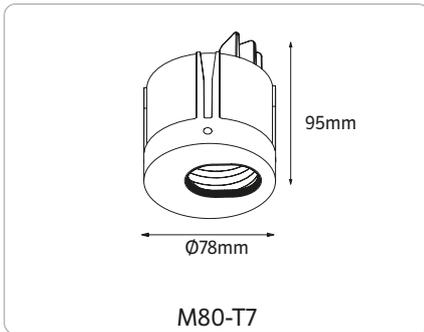

**Step 1: Choose Installation Frame**

See pages 202-203 for frame details

						
	<b>Recessed Round</b>	<b>Recessed Oval Double</b>	<b>Recessed Square</b>	<b>Recessed Rectangular Double</b>	<b>Trimless</b>	<b>Surface Cylinder</b>
Dimensions	Ø102 x H62mm	L192 x W102 x H62mm	L102 x W102 x H62mm	L192 x W102 x H62mm	Ø170 x H68mm	Ø106 x H146mm
Cut Out	Ø95mm	2x 95mm @ 90mm centres	Ø95mm	2x 95mm @ 90mm centres	Ø130mm	-
White Code	F80-RR-W	F80-RR2-W	F80-RSQ-W	F80-RSQ2-W	F80-TL-R	SF80-RR-W
Black Code	F80-RR-B	F80-RR2-B	F80-RSQ-B	F80-RSQ2-B	-	SF80-RR-B

**Step 2: Choose Module Type**

Model	Type	Trim/Body Colour	CCT	Beam
M80	- T7	- W (White), B (Black)	3K	- 36D
M80	- T10	- W (White), B (Black)	3K	

**Step 3: Select your Driver**

	TRIAC Dimmable	Dali	Casambi
M80-T7	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC260700-CAS-1325W @ 260mA
M80-T10	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC150500-CAS-712W @ 350mA

**Configuration Example:** For a Trimless Single M80-T7 Adjustable Highlighter in White and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F80-TL-R (2) Light Module: M80-T7-W3K-36D (3) Dimmable Driver: DCC260-DX-12W.