


SM File E - 124066



Applicazione Application

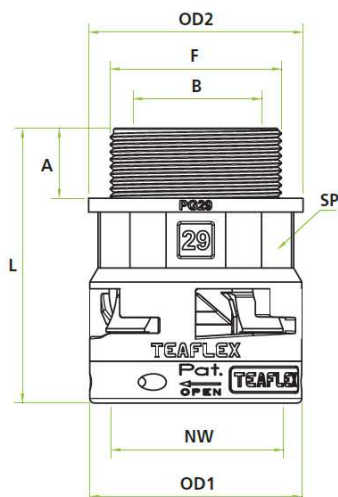

* = Add "B" to order BLACK colour or "G" to order GREY colour

• IP69K rating is not guaranteed for the fittings with nominal width 36 and 48

Straight fittings type SM are commonly used in the most industrial application branches. Several sizes and threads type are available. Due to the innovative design a gently compromise between outfit dimension and usable cross section is given.

Perfectly adaptable to corrugated conduits, these fittings answer positively the most heavy applications such as traction, impact, compression, torsion and vibration. Suit to standard requirements in industrial and electro technical installation applications.

Temperature Range: -40°C +105°C
Short term: +150°C

Esempio d'ordine / Order example: **6BSM23G04**

6 Grado di protezione: IP66 statico / IP54 dinamico
IP Rating: IP66 static / IP54 dynamic

B Colore - Color

SM Codice serie - Family type

23 Diametro nominale guaina - Nominal width

G Tipo di filettatura: GAS - Thread type: GAS

04 Dimensione filetto - Thread dimension



QR CODE: istruzioni di montaggio
QR CODE: assembly instructions



Type IP66	Type IP68-IP69K	F ISO Metric Thread	Conduit Code NW	Fits to metric Conduit	A mm	B mm	L mm	OD1 mm	OD2 mm	SP mm	Packing unit
6*SM07M12	8*SM07M12	M 12x1,5	7	10	12	9	40	17	17	14	100
6*SM07M16	8*SM07M16	M 16x1,5	7	10	12	9	40	17	20	14	100
6*SM10M12	8*SM10M12	M 12x1,5	10	12	12	8,8	41,4	20	20	17	100
6*SM10M16	8*SM10M16	M 16x1,5	10	12	12	10,5	41,4	20	20	17	100
6*SM10M20	8*SM10M20	M 20x1,5	10	12	12	15	41,4	20	24	17	100
6*SM12M16	8*SM12M16	M 16x1,5	12	16	12	11	44,65	24	24	20	100
6*SM12M20	8*SM12M20	M 20x1,5	12	16	12	13	44,65	24	26	20	100
6*SM17M20	8*SM17M20	M 20x1,5	17	20	13	14	46,85	30	28	26	50
6*SM17M25	8*SM17M25	M 25x1,5	17	20	13	18,5	46,85	30	30	26	50
6*SM23M25	8*SM23M25	M 25x1,5	23	25	14	19	57	38	38	32	30
6*SM23M32	8*SM23M32	M 32x1,5	23	25	14	27	57	38	40	32	30
6*SM29M32	8*SM29M32	M 32x1,5	29	32	15	26	59	45,5	46	40	20
6*SM29M40	8*SM29M40	M 40x1,5	29	32	15	33,5	59	45,5	46	40	20
6*SM36M40	8*SM36M40	M 40x1,5	36	40	17	33,7	69	57	54	50	20
6*SM36M50	8*SM36M50	M 50x1,5	36	40	17	40	69	57	58	50	20
6*SM48M50	8*SM48M50	M 50x1,5	48	50	17	42	75,5	68	66	64	10
6*SM48M63	8*SM48M63	M 63x1,5	48	50	17	49	75,5	68	70	64	10