


# Catalogue No: **800TC-XD1**

## CONTACT BLOCK FS SHALLOW 1NO

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley  
800T/800H Pushbuttons > Accessories > 800T/H Contact Blocks



### Contact Block For 800T/H Shallow 1NO Guards On Terminals

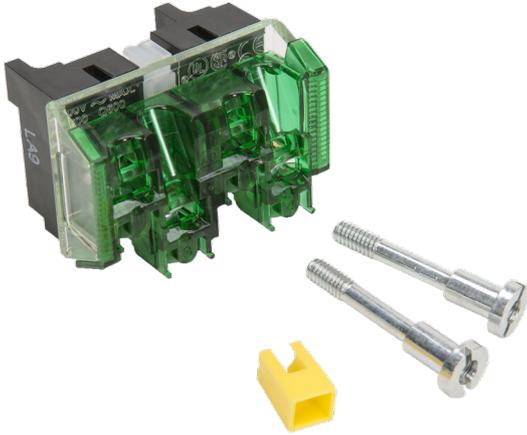

Representative Photo Only  
(actual product may vary based on configuration selections)

- 800T (metal) and 800H (plastic) 30.5 mm product lines are designed and constructed to perform in the most demanding industrial environments.
- Button caps made from thermoplastic polyester resin and deliver excellent resistance to corrosive agents and ensure color identification is never lost.
- Operator bushings are made from die cast zinc alloy giving strength and stability in installation.
- Riveted construction of the operator bushing, diaphragm seal and base plate, by four secure steel rivets, provides increased durability and tamper resistance.

#### SPECIFICATIONS

Product Series	800T
Component Type Pushbutton and Pilot Lights	Contact Block
Contact Configuration	1 NO
Self Monitoring	No Y / N
Un, Nominal Operational Voltage, AC	600 V AC
Un, Nominal Operational Voltage, DC	600 V DC
Contact Breaking Capacity, AC15, 110V	6.54 A
Contact Breaking Capacity, AC15, 120V	6 A
Contact Breaking Capacity, AC15, 240V	3 A
Contact Breaking Capacity, AC15, 415V	1.73 A
Contact Breaking Capacity, DC13, 24V	2.5 A
Contact Breaking Capacity, DC13, 30V	2.3 A
Contact Breaking Capacity, DC13, 110V	0.63 A
Contact Breaking Capacity, DC13, 120V	0.58 A
Contact Breaking Capacity, DC13, 220V	0.31 A
Compatible Product Series	800T / H compatible
Operating Temperature, Max	55 °C max
Operating Temperature, Min	-40 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Min	50 %RH
Relative Humidity, Max	95 %RH
IP Rating	IP2X
Shock Acceleration (Max.)	100 g
Shock Duration (Max.)	11 ms
Vibration Acceleration (Max.)	10 m/s <sup>2</sup>
Vibration Displacement (Peak to Peak Max.)	1.52 mm
Vibration Frequency, Operational (Max.)	2000 Hz

Catalogue No: **800TC-XD1**  
**CONTACT BLOCK FS SHALLOW 1NO**

Operator Control Devices > Pushbuttons and Control Switches > Pushbuttons and Pilot Lights > Allen-Bradley  
800T/800H Pushbuttons > Accessories > 800T/H Contact Blocks



Standards Compliance	UL 508 CSA C22.2 No. 14 EN 60947-5-1 EN 60947-5-5 ISO 13850
----------------------	---

Certifications	CE CSA UL CCC
----------------	------------------------

#### REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	<a href="#">800TCXD1_Manufacturer Datasheet</a>
Manufacturer Catalogue & Product Selection:	<a href="#">800T/800H_Manufacturer Catalogue</a>