

# Catalogue No: 150-C25NBD

## SMC-3 SOFT STARTER 480V 25A MD3W 100-240V AC CONTROL

Motor Control and Drives > Soft Starters, Low Voltage > Industrial Soft Starters > Allen-Bradley LV Soft Starters > SMC-3 Soft Starters > Panel Mount - IP2X 200 to 480V AC Three-Phase with 100 to 240V AC Control Power



Representative Photo Only  
(actual product may vary based on configuration selections)

Soft starter 25A, with motor protection, supply voltage 480V AC, control voltage 100...240V AC

- Integral bypass minimises heat generation allowing for reduced enclosure size and reduced total cost
- Ultra-compact size means reduced panel space and allows for higher-density installations
- Easy and secure setup allows for process optimisation and setup efficiency
- LED indicator gives instant status information and assists during troubleshooting

### SPECIFICATIONS

Product Series	SMC-3 (Bul. 150-C)
IP Rating	IP20
Component Type Motor Control and Drives	LV Soft Starter
Rated Current, Light Duty, 3 Wire	25 A, 3 wire
Rated Current, Normal (Medium) Duty, 3 Wire	25 A, 3 wire
Medium Duty Approx. kW (400/415 V AC, 3 wire)	11
Inbuilt Motor Protection	Yes, advanced
Bypass Contacts	Yes, internal
Control Voltage	110 - 240 V AC
Control Voltage, AC, Min	100 V AC min
Control Voltage, AC, Max	240 V AC max
Height	140 mm
Width	45 mm
Depth	100 mm


### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **150-C25NBD**

**SMC-3 SOFT STARTER 480V 25A MD3W 100-240V AC CONTROL**

Motor Control and Drives > Soft Starters, Low Voltage > Industrial Soft Starters > Allen-Bradley LV Soft Starters > SMC-3 Soft Starters > Panel Mount - IP2X 200 to 480V AC Three-Phase with 100 to 240V AC Control Power

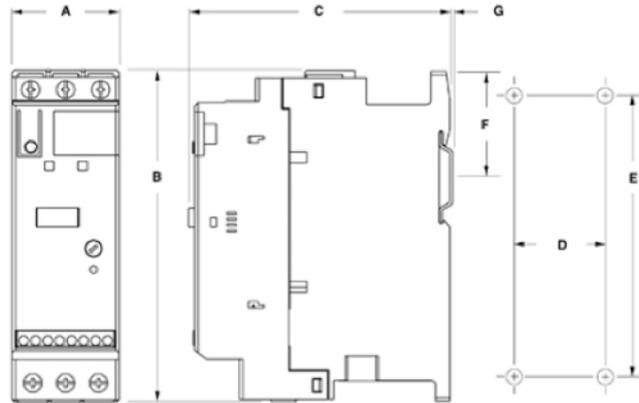

A	B	C	D	E	F	G	Mounting hole size	Kg	Cat. No.
44.8	139.7	100	35	132	46.4	2	4.6	0.86	<b>150-C3...37</b>
72	206	130	55	198	102	2	5.3	2.25	<b>150-C43...85</b>
196.4	443.7	205.2	166.6	367	-	-	7.5	15	<b>150-C108...135</b>
225	560	265.3	150	504.1	-	-	11.5	30.4	<b>150-C201...251</b>
290	600	298	200	539.2	-	-	11.5	45.8	<b>150-C317...480</b>

Dimension Diagram