



SPECIFICATIONS

DIMENSIONS	X55 (Round): D55 x H82mm X61 (Square): L55 x W55 x H82mm
CUT OUT	Ø43mm
COLOUR TEMP	2700K, 3000K, 4000K or RGBW
CRI	>80
LIFESPAN	40,000hrs (L80 B10)
BEAM ANGLE	19°, 36° or 60°
MATERIAL	316 Stainless Steel or Copper
IP RATING	IP67
IK RATING	IK10
CLASSIFICATION	IC-F Rated
CLEARANCE	0mm, zero clearance required
DRIVER	Sold separately. Dimmable (24V CV), Non-dimmable (8-25V CV)
DIMMABLE	Dimmable option available (24V DC)
APPLICATION	Exterior and interior multi-use
WEIGHT CAPACITY	<2000kg
COMPLETE WITH	500mm feed cable. Single colour pre-wired with quick connect IP67 plug. See wiring accessories for compatible extensions/sockets. RGBW not compatible with quick connect accessories.
WARRANTY	5 Year Warranty

Non-dimmable 2700K, 3000K, 4000K

170 LUMENS	2.5 WATTS	8-25V PARALLEL
-------------------	------------------	-----------------------

Dimmable 2700K, 3000K, 4000K

170 LUMENS	2.5 WATTS	24V PARALLEL
-------------------	------------------	---------------------

RGBW

2.5 WATTS	24V PARALLEL
------------------	---------------------



Driver sold separately, specify when ordering.


ACCESSORIES

Installation housings, feed cables, loop/extension cables, two way and three way spot sockets available. See accessories page for further details.

AVAILABLE IN

Example code = **X55-ST53K-D-36D** (Round standard single beam up/down, 316 STS, 3000K, dimmable, 36° beam).

Model	-	Finish	Colour Temp	-	Dimmable	-	Beam Angle
X55 (Round) X61 (Square)	-	B = Black 316 STS COP = Copper STS = 316 STS	27K = 2700K 3K = 3000K 4K = 4000K RGBW = RGB + 3000K	-	D = Dimmable	-	19D = 19° beam 36D = 36° beam 60D = 60° beam

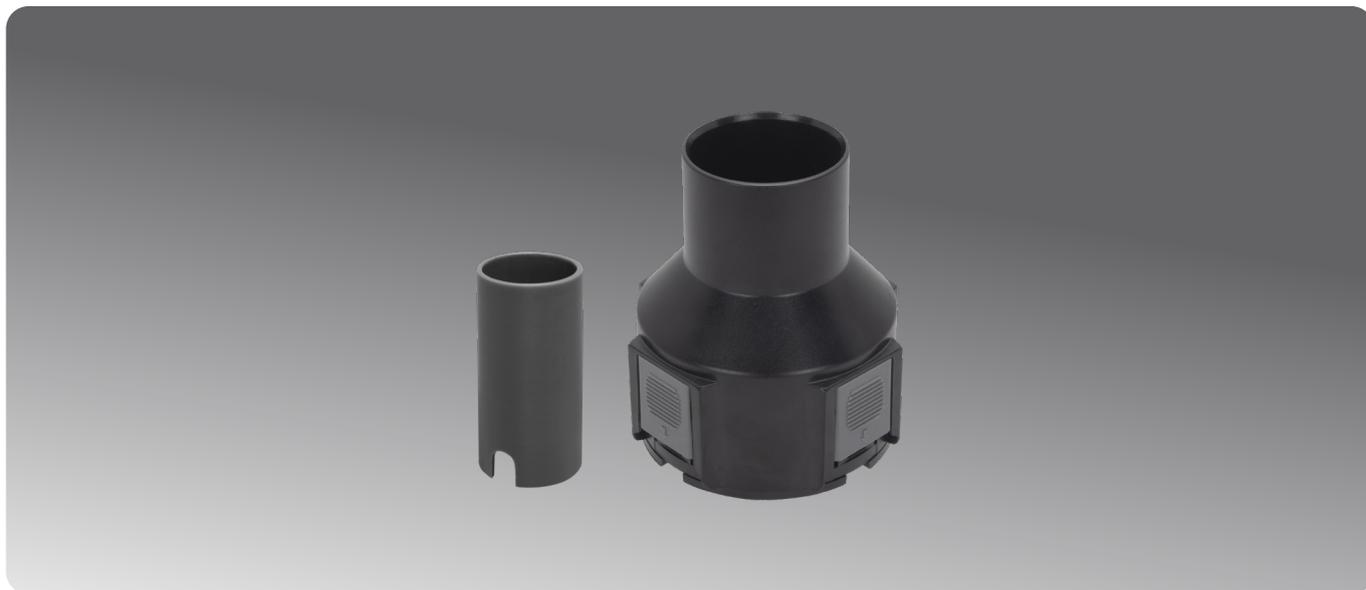

WIRING ACCESSORIES

Suitable for Single Colour fittings only, not compatible with RGBW

DESCRIPTION	X25-X32 CODE	X55-X62 CODE
1m Feed Cable	X25-FC1M	EX110 FC1M
10m Feed Cable	X25-FC10M	EX110 FC10M
1.5m Loop/Extension Cable	X25-LC1.5M	EX110 LC1.5M
2m Loop/Extension Cable	-	EX110 LC2M
3m Loop/Extension Cable	X25-LC3M	EX110 LC3M
5m Loop/Extension Cable	X25-LC5M	EX110 LC5M
10m Loop/Extension Cable	X25-LC10M	EX110 LC10M
Two Way Spot Socket	X25-S2	EX110 S2
Three Way Spot Socket	X25-S3	EX110 S3



HOUSING ACCESSORIES

DESCRIPTION	DIMENSIONS	CODE
X25-X32 In-wall Installation Sleeve	D22 x H50mm Cut out: Ø23mm	X25-IWS
X55-X62 In-wall Installation Sleeve	D47 x H95mm Cut out: Ø48mm	X55-IWS
X55-X62 Inground Installation Housing	D88 x H97mm Cut out: Ø90mm	X55-IGH

