




PDL

NEW PRODUCT DATA AND APPLICATION SHEET

CATALOGUE # **BARCODE #**
140F 9416175138614

DESCRIPTION Fire & acoustic rated flush box

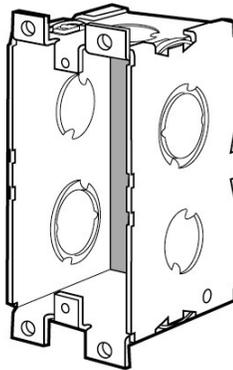

BOX QUANTITY 20 **OUTER QUANTITY** Nil

FEATURES Two hour fire rating.
Acoustic STC rating of walls up to 60 will not be degraded by using this flush box (limitations apply – see instruction leaflet). Stud mounted, heavy gauge flush box for durability and easy installation.

APPLICATIONS For use in fire rated and acoustic rated gib walls to ensure the ratings of the wall are not compromised by the installation of electrical accessories.

COMMENTS Any queries with regard to the fire rating of the 140F should be directed to Richard Cherrie at Cimpex New Zealand Ltd.
Ph: (09) 631 5032 Fax: (09) 631 5032.
Acoustic rating is the opinion of Marshall Day Acoustics (NZ).

FAQ's Generally suitable for use with PDL 500 and 600 Series accessories
Not suitable for RCD units or Shaver Sockets