


## Product data sheet

### Characteristics

# NSYPLM43G

## wall-mounting enclosure polyester monobloc IP66 H430xW330xD200mm

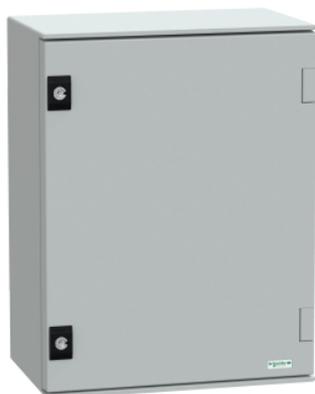

### Main

Range	Thalassa
Product name	Thalassa PLM
Device short name	PLM
Enclosure type	Multi-purpose
Category	Compact enclosure
Nominal height	430 mm
Nominal width	330 mm
Nominal depth	200 mm
Enclosure mounting	Wall mounted
Device composition	1 body 1 door 2 lock
Door type	Plain
Lock type	3 mm double-bar lock

### Complementary

Number of locks	2
Mounting plate description	Without mounting plate
Accessibility for operation	Front
Removable parts	Door by hinges
Material	Polyester reinforced with fibreglass
Colour	Grey (RAL 7035)
Standards	NEMA classification 4X NEMA classification 13 IEC 62208
Product certifications	UL
Electrical insulation class	Class II

### Environment

IP degree of protection	IP66 conforming to IEC 60529
IK degree of protection	IK10 conforming to IEC 62262
Fire resistance	960 °C conforming to IEC 62208
Ambient air temperature for operation	-40...80 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	5.173 kg
Package 1 Height	23 cm
Package 1 width	35 cm
Package 1 Length	48.5 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>