


## ELFOO SURFACE MOUNTED LINEAR LIGHT

### PRODUCT DETAILS

Size: 1200mm, Linkable  
 Rated life: L80 B10 50000hrs  
 LED: 4000K, CRI80, 3SDCM  
 Beam angle: Symmetrical, 80°  
 Glare control: UGR19 design  
 Driver: Integral, DALI dimming, Flicker free design  
 Rating: IP20, Class I  
 Operating temperature: 0°C to +40°C  
 Housing: Aluminium  
 Finishing: White RAL9003/Black RAL7021, Powder coated  
 Diffuser/Lens: Polycarbonate (PC), Black cells  
 Accessory: Complete with Linking kit  
 Warranty\*: 5 year


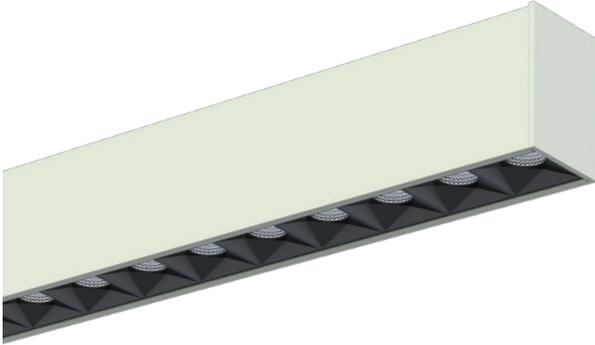


### MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

1500mm, Silver finishing, Non dimmable, Other dimming technology, Casambi, Tunable white

### APPLICATIONS

Surface mounted (ceiling), Internal  
 Offices, Schools, Commercial interiors



VERSION	L (MM)	W (MM)	H (MM)
ELFOO12840DAW	1290	53	78
ELFOO12840DAB	1290	53	78

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS*	EFFICACY	WEIGHT
ELFOO12840DAW	ELFOO SURFACE MOUNTED 1200 30W 4K DALI DIM WHITE	30W	3300LM	110LM/W	3.80KG
ELFOO12840DAB	ELFOO SURFACE MOUNTED 1200 30W 4K DALI DIM BLACK	30W	3300LM	110LM/W	3.80KG

\*Please refer to the warranty policy at [www.pierlite.co.nz](http://www.pierlite.co.nz); "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.