

## MAXI MASTER FLOODLIGHT GEN3



### PRODUCT DETAILS



- Lumen maintenance: L70 54,000hrs (TM21 Reported @ +50°C)
- LED: Colour Select 3000K/4000K/5000K, CRI80, 7SDCM
- Optic type: Symmetrical, Asymmetrical
- Driver: Integral, Lumen Select, Non dimmable
- Surge protection: 10kV/10kV
- Rating: IP66, IK08, Class I
- Operating temperature: 0°C to +50°C
- Housing: Chromated die-cast LM6 body, galvanized etched bracket
- Finishing: Black, Powder coated
- Diffuser/Lens: Tempered glass, Clear
- Connection: 2x20mm metal cable gland, 6mm square terminal block
- Warranty: 5 year

### MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Amber (1850K) LEDs

### APPLICATIONS

Pole or Wall mounted, External  
Large industrial areas, Carports, General floodlighting

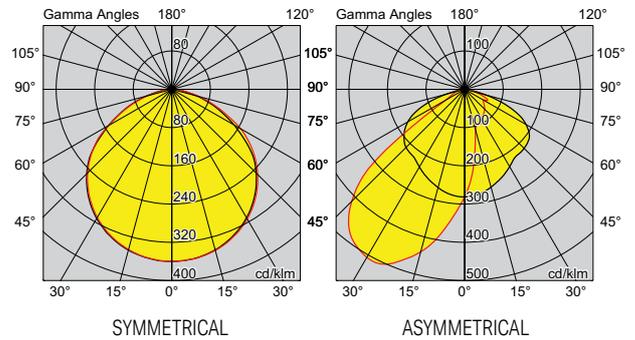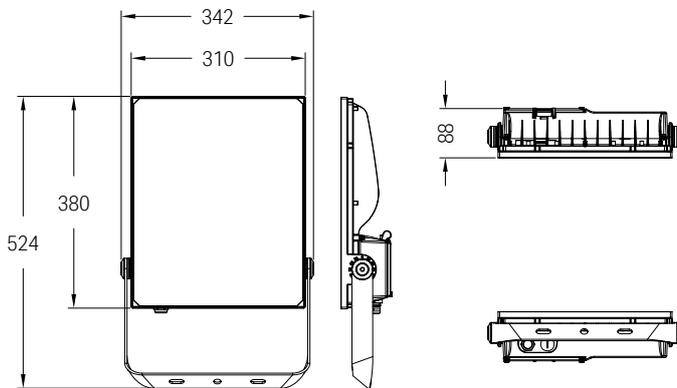

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS*	EFFICACY	WEIGHT
MML250LSCSS	MAXI MASTER FLOODLIGHT 100/150/200/250W 4K SYMMETRICAL	100W	14500LM	145LM/W	6.2KG
		150W	21200LM	141LM/W	
		200W	28400LM	142LM/W	
		250W	35400LM	142LM/W	
MML250LSCSA	MAXI MASTER FLOODLIGHT 100/150/200/250W 4K ASYMMETRICAL	100W	13800LM	138LM/W	6.2KG
		150W	21300LM	142LM/W	
		200W	27200LM	136LM/W	
		250W	33900LM	136LM/W	

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire @ 4000K, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.