

SHADOW FLOODLIGHT GEN3




PRODUCT DETAILS


- Lumen maintenance: L70 54,000hrs
- LED: Colour Select 3000K/4000K/5000K, CRI80, 6SDCM
- Beam angle: Symmetrical, 110°
- Driver: Integral, Lumen Select 15/30W, Fixed Output 50W, Non dimmable
- Surge protection: 4kV/6kA
- Rating: IP65, IK08, Class I
- Operating temperature: -25°C to +40°C
- Housing: Slimline chromated LM6 marine grade aluminum
- Finishing: Black RAL7021, Powder coated
- Diffuser/Lens: opaque low glare glass
- Connection: 1m flex
- Accessory: Complete with corner mount bracket
- Warranty: 5 year

APPLICATIONS

Surface mounted (ceiling/wall), External
Residential, Light commercial

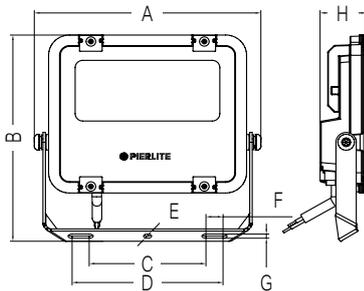

VERSION	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)	G (MM)	H (MM)
SHAD30CSLSG3	178	168	92	119	6.5	13.5	6.5	37
SHAD50CSG3	223	205	144	164	6.5	10	6.5	36
SHAD100CSG3	308	290	190	210	6.5	10	6.5	58
SHAD200CSG3	374	345	230	250	10.5	10	10.5	58



CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
SHAD30CSLSG3	SHADOW FLOODLIGHT 15W/30W COLOUR SELECT 3000K/4000K/5000K GEN3	30W 15W	4050LM 2080LM	135LM/W 139LM/W	0.8KG
SHAD50CSG3	SHADOW FLOODLIGHT 50W COLOUR SELECT 3000K/4000K/5000K GEN3	50W	6600LM	132LM/W	1.0KG
SHAD100CSG3	SHADOW FLOODLIGHT 100W COLOUR SELECT 3000K/4000K/5000K GEN3	100W	14000LM	140LM/W	2.2KG
SHAD200CSG3	SHADOW FLOODLIGHT 200W COLOUR SELECT 3000K/4000K/5000K GEN3	200W	28000LM	140LM/W	3.4KG

"POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire; ^Figures are interpolated / extrapolated from data at other versions.