

Cu Aerial - Neutral Screen

Cu Aerial - Neutral Screen 3 x 16mm²

Contact

Sales and Customer Solutions
sales.nz@nexans.com

Nexans Ref.: FAGT15AA003CXRJ

Country Ref.: 6234

Hard drawn copper conductor, PVC insulation, Copper Neutral Screen, PVC Sheath.
Made to ASNZS 4961.


DESCRIPTION

Can be used for aerial reticulation to residential and rural areas where reliability, safety and low installation costs are required.

It is also designed for residential and rural areas for reducing the bushfire hazards.

The covering contains a high level of carbon black for UV resistance.

It is designed for where reliability, safety and low installation costs are required, but it is only for short spans due to increased weight.

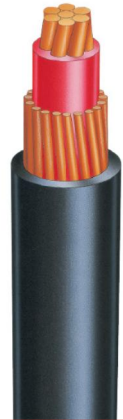

STANDARDS

National AS/NZS 4961

Cu Aerial - Neutral Screen

Cu Aerial - Neutral Screen 3 x 16mm²

Contact

Sales and Customer Solutions
sales.nz@nexans.com

CHARACTERISTICS

Construction characteristics

Pilot wires	None
Conductor material	Copper
Insulation	PVC
Screen	Copper wire
Outer sheath	PVC
Sheath colour	-

Dimensional characteristics

Number of cores	3
Conductor cross-section	16 mm ²
Nominal overall diameter	20.7 mm
Approximate weight	0.87 kg/m

Electrical characteristics

Rated Voltage U ₀ /U (U _m)	0.6/ 1 (1.2) kV
---	-----------------

Usage characteristics

Maximum operating temperature	75 °C
-------------------------------	-------

NOTE

1. Content from AS/NZS 3008.1.2:2010 has been reproduced with the permission from Standards New Zealand under Copyright Licence 000926. Please see the Standard for full details.
2. Current ratings are based on an ambient temperature of 30°C, a maximum conductor temperature of 75°C, summer noon and intensity of solar radiation 1000 W/m².