
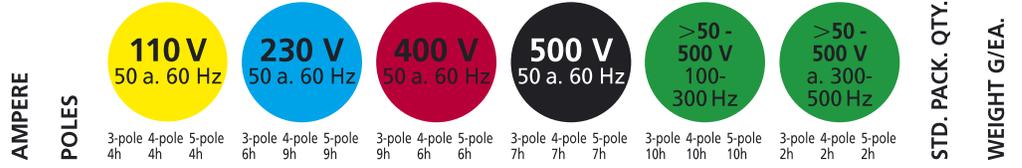


MENNEKES CEE panel mounted receptacles

to DIN VDE 0623, EN 60309-2.

Other voltages and frequencies available on request.



STD. PACK. QTY.
WEIGHT G/EA.



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 Flange 73.5 x 64 mm (16A), 3-pole, 100 x 92 mm, 20° inclination Dimensions: page 54/55																					
16	3	1474	1475		1476															10	151
16	4	1477	1478		1479			1480			1481			1482						10	203
16	5	1483	1484		1485															10	237
16	7	Please see page 38																			
32	3	1501	1502		1503															10	281
32	4	1504	1505		1506			1507			1567			1568						10	291
32	5	1489	1490		1551															10	334
32	7	Please see page 38																			



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 SoftCONTACT, Flange 110 x 106 mm, 20° inclination Dimensions: page 54/55																					
63	3	2179A	2180A		2181A															5	520
63	4	203A	204A		205A			206A												5	607
63	5	207A	208A		209A			3507												5	668



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 TorsionSpringCONTACT, Flange 114 x 110 mm, 15° inclination Dimensions: page 54/55																					
125	3		3575																	5	840
125	4	210A	211A		212A			213A												5	940
125	5	214A	215A		216A															5	1171

Products with pilot contacts: article number + index **P** (instead of **A**)



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 Flange 75 x 75 mm (16A), 85 x 75 mm (32A), straight Dimensions: page 54/55																					
16	3	217A	218A		219A															10	160
16	4	220A	221A		222A			223A			224A			225A						10	183
16	5	226A	227A		228A															10	221
16	7	Please see page 38																			
32	3	229A	230A		231A															10	266
32	4	232A	233A		234A			235A			236A			237A						10	293
32	5	238A	239A		240A															10	314
32	7	Please see page 38																			



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 SoftCONTACT, Flange 107 x 100 mm, straight Dimensions: page 54/55																					
63	3	1263A	1264A		1265A															5	567
63	4	1122A	1123A		1124A			1125A												5	604
63	5	1126A	1127A		1128A															5	664



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 TorsionSpringCONTACT, Flange 130 x 130 mm, straight Dimensions: page 54/55																					
125	3		3380																	5	1001
125	4	1455	1456		1457			1458												5	1135
125	5	1459	1460		1461			3283												5	1256

Products with pilot contacts: article number + index **P** (instead of **A**)



AMPERE	POLES	3-pole 4h	4-pole 4h	5-pole 4h	3-pole 6h	4-pole 9h	5-pole 9h	3-pole 9h	4-pole 6h	5-pole 6h	3-pole 7h	4-pole 7h	5-pole 7h	3-pole 10h	4-pole 10h	5-pole 10h	3-pole 2h	4-pole 2h	5-pole 2h	STD. PACK. QTY.	WEIGHT G/EA.
♣ IP 67 Flange 85 x 85 mm, 20° inclination Dimensions: page 54/55																					
16	3	903	905																	10	158
16	4				1081			1082												10	
16	5				1103															10	224
32	3	3197	3200																	10	260
32	4				3254			3256												10	282
32	5				3524															10	326



Auxiliary contact switch for panel mounted receptacles IP44 and IP67, with flange 85 x 85 mm
 for additional functions such as control, monitoring, signalling, electrical interlocking etc.
 10A/400V, 16A/230V
 Function: two way contact = make/break contact
Article number 41000