




Part no. : 1366

Panel mounted receptacle

for cable ducts and flush mounted installation boxes

32A, 3P and 4P, suitable only for installation in flush mounted boxes 40369 and 40374

with uniform flange dimensions and uniform fixing dimensions

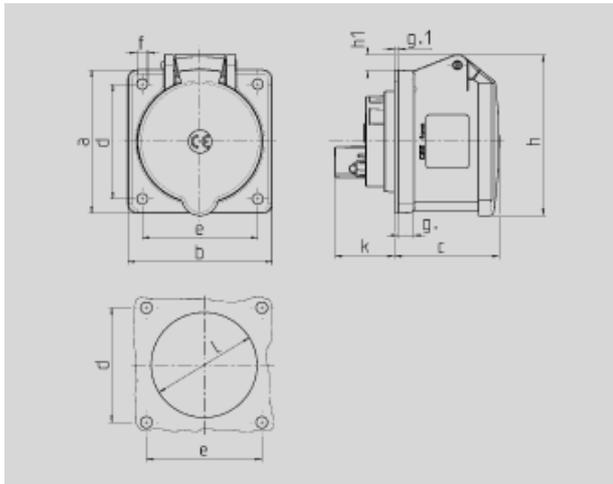

Drawing 1 MB 247	Amp. Poles	16			32		
		3	4	5	3	4	5
Dim. in mm	a	75	75	75	75	75	75
	b	75	75	75	75	75	75
	c	53	53	55	64	64	65
	d	60	60	60	60	60	60
	e	60	60	60	60	60	60
	f	5.5	5.5	5.5	5.5	5.5	5.5
	g	8	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	75	80	83	89	89	100
	h1		6	8	11	11	12
	k	31	32	32	39	39	39
l	43	52	54	58	58	62	
Terminal for cond. cross section (mm ²) min.-max.		1.5	1.5	1.5	2.5	2.5	2.5
		-4	-4	-4	-10	-10	-10

 Article-group : **1056**

voltages : 230V

rated current : 16A

pole : 3 pole

IP protection types : IP44

position of ground contact : 6h

packing unit : 0010

weight : 136 g

PART NUMBERS

	V	110V	230V	400V	500V	>50-500V	
	Hz	50,60	50,60	50,60	50,60	100-300	300-500
	colour						
	amp.						
16 A	3	1365	<u>1366</u>	1367		3054	3055
	4	1388	1389	1390	1391	1392	1393
	5	1384	1386	1385	3057	3059	3060
32 A	3	1394	1395	1396			
	4	1397	1398	1399	1400	1401	1402
	5	3449	3454	3451	3452	3455	3447