




Part no. : 2177A

**32A4P 3H400-440V**
**Kupplung AM-TOP IP67**

with high heat resistant contact carriers and nickel plated contacts

with cable gland

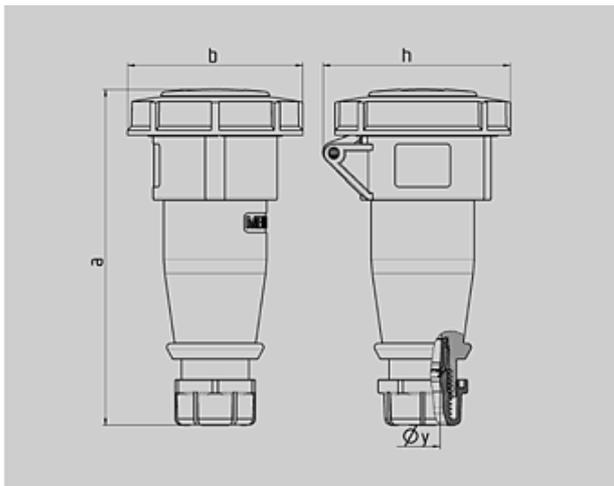

Drawing	Amp. 3 MB 62 Poles	16			32		
		3	4	5	3	4	5
Dim. in mm	a	146	166	172	212	212	213
	b	72	79	89	96	96	102
	h	80	88	95	98	98	105
	y	14,5	16	16	22	22	22
Terminal for cond. cross section (mm <sup>2</sup> ) min.-max.		1 -2,5	1 -2,5	1 -2,5	2,5 -6	2,5 -6	2,5 -6

Article-group : 3149

voltages : 400-440V

rated current : 32A

pole : 4 pole

IP protection types : IP44

position of ground contact : 3h

packing unit : 0010

weight : 385 g

**PART NUMBERS**

V	400-440V
colour	
amp.	
32 A	4
	<b>2177A</b>