



order number : 209A

Panel mounted receptacle

63A: with SoftCONTACT

125A: with TorsionSpringCONTACT


Contact carrier: highly heat resistant

Products with pilot contacts: order number+index P, e. g. 216 P.

63A5P 6H400V panel mounted receptacle

TA, IP67

with frame terminal and SoftCONTACT

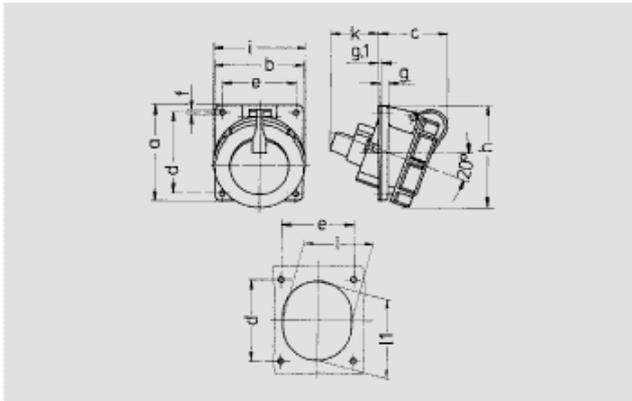

1 MB 289 Amp.	16	32	125
1 MB 339 Pole	3	5	5
Maße in mm			
a	73,5	100	114
b	64	92	110
c	58	66	83
d	60	85	90
e	52	77	90
f	5,2	5,3	6,2
g	8	8	13
h	85	113	135
i	70	110	135
k	40	52	104
l	52	73	—
l1	60	85	—
R	—	—	47
α	20°	20°	15°
Leiterquerschnitt von bis mm ²	1,5 —4	2,5 2,5	25 —70

Article-group : 1048

voltages : 400V

rated current : 63A

pole : 5 pole

IP protection types : IP67

position of ground contact : 6h

packing unit : 0005

flange, fixing hole : FL 110x106mm BL 85x77mm N20°

pilot contact (63A-125A) : without pilot-contact

contact carriers : standard

contact technique : reliable contact

weight : 695 g

PART NUMBERS		110V	230V	400V	500V	>50-500V	
	V	110V	230V	400V	500V	>50-500V	
	Hz	50,60	50,60	50,60	50,60	100-300	300-500
	colour						
	amp.						
63 A	3	2179A	2180A	2181A			
	4	203A	204A	205A	206A		
	5	207A	208A	209A	3507		
125 A	3		3575				
	4	210A	211A	212A	213A		
	5	214A	215A	216A			