


Universal Timer Board

AT2-PCB

5 - 30V/DC with 9 selectable time modes



www.aap.co.nz

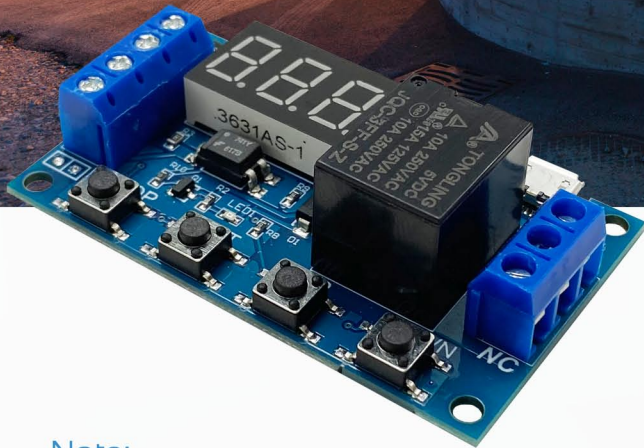

Note:

15VDC - The relay on this product is rated for continuous use with a power input up to 15VDC

24VDC - The relay on this product is rated for up to 5 minutes of continuous use with a 10% duty cycle with a power input up to 24VDC

Specifications

- Input Voltage: 5 – 30VDC
- Trigger Voltage: 5 – 30VDC
- Relay Contacts: 5 – 30VDC @ 5A
- Standby Current: 20mA
- Operating Current: 50mA
- Time increments: 0.1sec to 16.5hours
- Dimensions: 63mm x 37mm x 20mm
- Operating Temperature: -20 to 60 Degrees
- Time Functions: 9 Selectable Time Modes



Proudly Supplied by AAP
344B Rosedale Road, Albany, O632
Auckland, New Zealand
www.aap.co.nz