

GBL821/2/3

# AURORA IV

IP65 LED BOLLARD



GBL821



GBL822




GBL823




## FEATURES

- Die-cast aluminium alloy body
- Powder coated finish
- Clear polycarbonate diffuser
- Matte aluminium reflector
- Constant current LED driver fitted
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -35°C to +45°C

## PHOTOMETRIC DATA

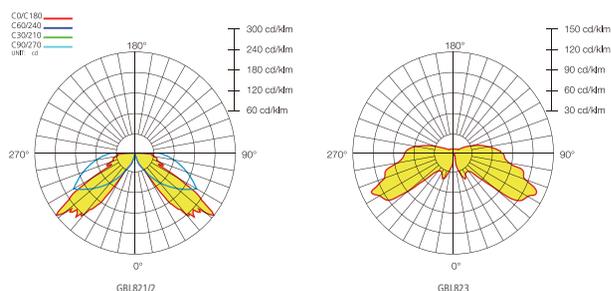


## DIMENSIONS

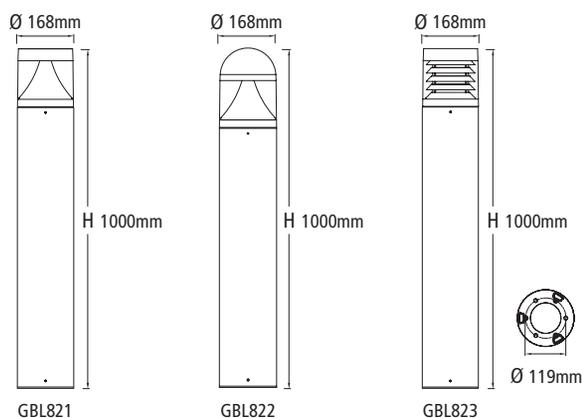

## OPTION

- GBL821/J BOLTS (please order separately)

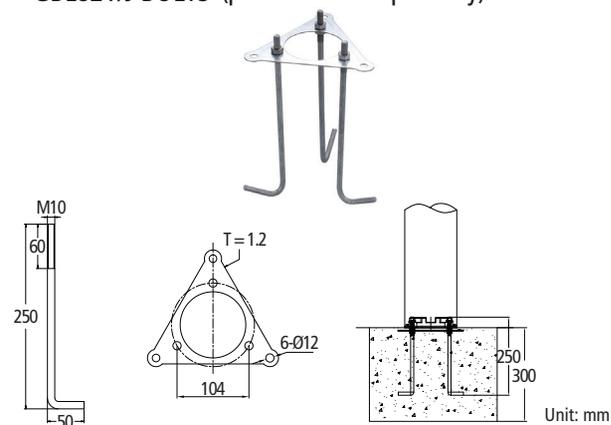

## TECHNICAL SPECIFICATIONS

| MODEL NO.    | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm) | COLOUR TEMPERATURE (K) | CRI | FITTING COLOUR | NET WEIGHT (kg) |
|--------------|-------------------|-----------|------------|------------------------|-----|----------------|-----------------|
| GBL821 TC BK | 230               | 25        | 2300       | 3000/4000/5000         | >75 | Black          | 5.0             |
| GBL822 TC BK | 230               | 25        | 2300       | 3000/4000/5000         | >75 | Black          | 5.1             |
| GBL823 TC BK | 230               | 25        | 1600       | 3000/4000/5000         | >75 | Black          | 5.8             |

ⓘ Specifications above are for reference only and may vary without prior notice