

ECOLINE

WATTAGE SELECTABLE LED BATTEN

GBT503




Quick & Easy to Install



FEATURES

- Slim steel body
- Powder coated finish
- Opal polycarbonate diffuser
- Constant current LED driver fitted
- Multiple cable entrance position
- Select wattage with DIP switch
- Factory setting: 2 foot 17.5W / 4 foot 35W / 5 foot 52W
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

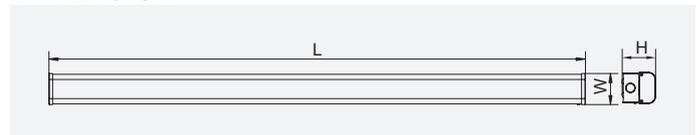

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN TEMPERATURE (lm)	COLOUR (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	CARTON QUANTITY
GBT503/60 CW	230	11	1383	4000	>80	120	615x71x76	White	6
		14.5	1823						
		17.5	2200						
		20	2514						
GBT503/120 CW	230	22	2765	4000	>80	120	1221x71x76	White	6
		29	3645						
		35	4400						
		40	5028						
GBT503/150 CW	230	33	4148	4000	>80	120	1523x71x76	White	6
		44	5531						
		52	6536						
		60	7542						

Specifications above are for reference only and may vary without prior notice