

MR16

LED DIRECTIONAL MR16 LAMP



GMR16 5W



GMR16 6W TC



GMR16 7.5W DIM



FEATURES


- 12V AC/DC input
- PBT covered aluminium housing
- 60° polycarbonate lens
- High efficiency LED chips
- High colour rendering
- 12V AC or DC driver required
- Select colour temperature with DIP switch



GMR16 7.5W DIM

- Die-cast or poly covered aluminium housing
- Shockproof frosted polycarbonate lens
- High efficiency LED chips
- Directly replace MR16 halogen lamp
- 12V AC or DC driver required
- Compatible with a leading brand electronic transformer
- Suits most halogen MR16 fittings

DIMENSIONS

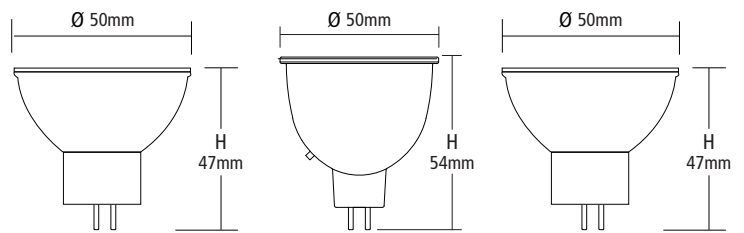

GMR16 5W

GMR16 6W TC

GMR16 7.5W DIM

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	LAMP BASE	CARTON QUANTITY
GMR16 5W WW	12 AC/DC	5	350	3000	>80	38	GU5.3	100
GMR16 5W DL		5	350	6000				
GMR16 6W TC		6	450/520/450	3000/4000/6500	>95	60		
GMR16 7.5W WW DIM		7.5	500	3000				
GMR16 7.5W DL DIM		7.5	550	5700				