

# MR16

LED DIRECTIONAL MR16 LAMP

## GMR16



GMR16 6W TC



GMR16 7.5W DIM



### FEATURES


- 12V AC/DC input
- PBT covered aluminium housing
- 60° polycarbonate lens
- High efficiency LED chips
- High colour rendering
- 12V AC or DC driver required
- Select colour temperature with DIP switch



### GMR16 7.5W DIM

- Die-cast or poly covered aluminium housing
- Shockproof frosted polycarbonate lens
- High efficiency LED chips
- Directly replace MR16 halogen lamp
- 12V AC or DC driver required
- Compatible with a leading brand electronic transformer
- Suits most halogen MR16 fittings

### DIMENSION

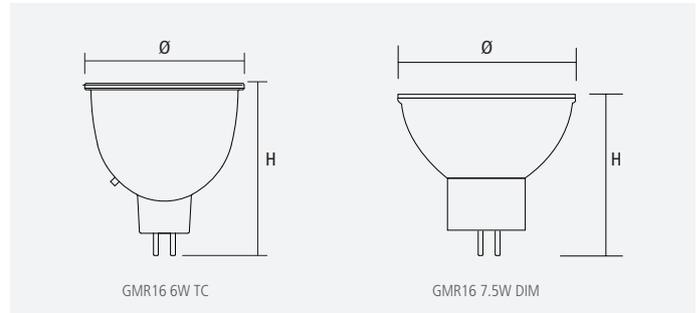

### TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	LAMP BASE	CARTON QUANTITY
GMR16 6W TC	12 AC/DC	6	450/520/450	3000/4000/6500	>80	60	50 x 54	GU5.3	100
GMR16 7.5W WW DIM	12 AC/DC	7.5	500	3000	>95	60	50 x 47	GU5.3	100
GMR16 7.5W DL DIM	12 AC/DC	7.5	550	5700	>95	60	50 x 47	GU5.3	100