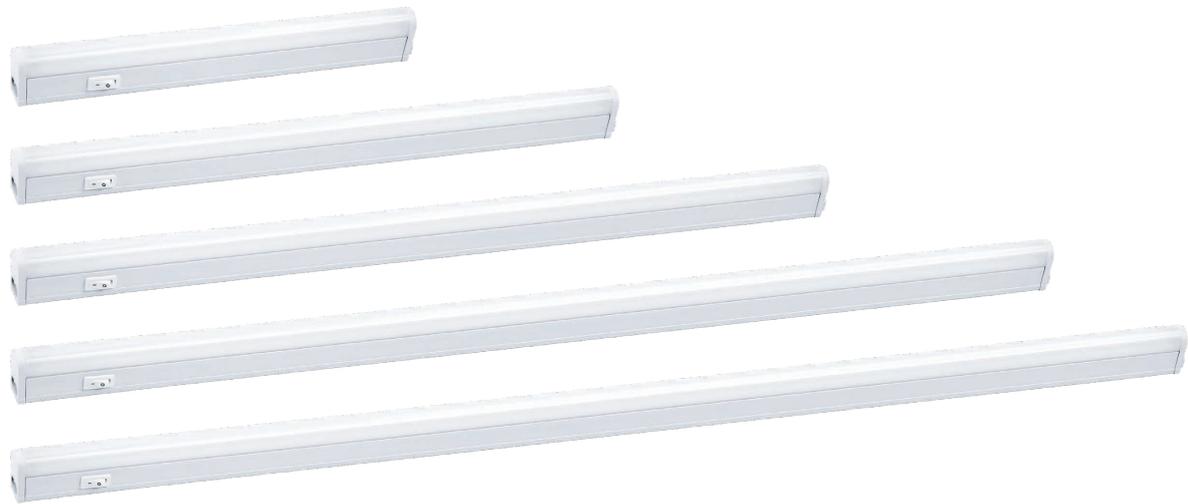


# SEAMLESS SLIMLINE


TRI COLOUR LINKABLE LED BATTEN

**GBT506**


## FEATURES


- Polycarbonate body
- Double insulated PC housing
- Opal polycarbonate diffuser
- Built-in constant current LED driver
- Mounting bracket and connector (Straight & 10 cm flexible) included
- Select colour temperature with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: 0°C to +25°C

## DIMENSION



## ACCESSORIES

- GBT506/32CM LINK (L 320 mm)
- GBT506/76CM LINK (L 760 mm)

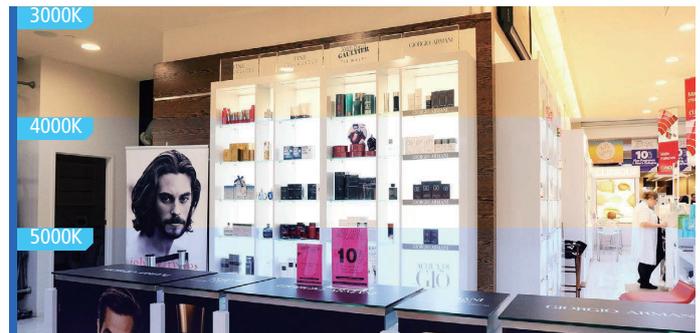

### Mixed connections **maximum 240W**

GBT506/280 TC	1	2	3	4...	55pcs
GBT506/540 TC	1	2	3	4...	25pcs
GBT506/840 TC	1	2	3	4...	17pcs
GBT506/1140 TC	1	2	3	4...	12pcs
GBT506/1440 TC	1	2	3	4...	10pcs

## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR	CARTON QUANTITY
GBT506/280 TC	230	4	300/380/300	3000/4000/5500	>80	105	280 x 23 x 36	White	30
GBT506/540 TC	230	9	750/800/750	3000/4000/5500	>80	105	540 x 23 x 36	White	30
GBT506/840 TC	230	13	1050/1200/1050	3000/4000/5500	>80	105	840 x 23 x 36	White	20
GBT506/1140 TC	230	18	1550/1600/1600	3000/4000/5500	>80	105	1140 x 23 x 36	White	20
GBT506/1440 TC	230	22	1800/2000/1800	3000/4000/5500	>80	105	1440 x 23 x 36	White	20

Specifications above are for reference only and may vary without prior notice