

GKI126 LEO
IP67 LED INGROUND LIGHT



GKI126




GKI126S




FEATURES

- Die-cast aluminium body and 316L stainless steel face cover
- Powder coated finish
- Step tempered glass diffuser
- High performance multi-reflector system
- Glass pressure capacity = 2526kgs
- Installation PVC sleeve included
- IP68 PG9 PVC cable gland
- 24V DC driver required
- LED lifespan: 50000 hours @ L70, Ta 25°C
- Ta: -20°C to +40°C

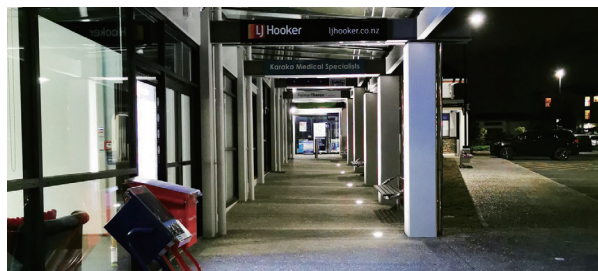


DIMENSIONS

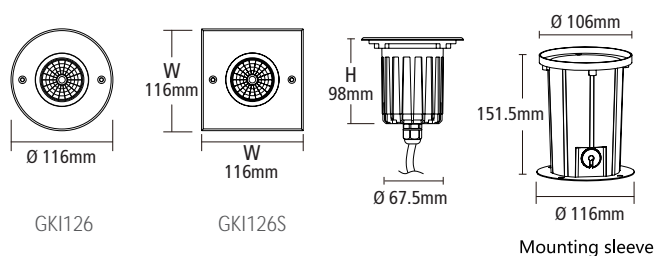

OPTIONS

- ANTI-GLARE LOUVRE:
- MH006 for GKI126

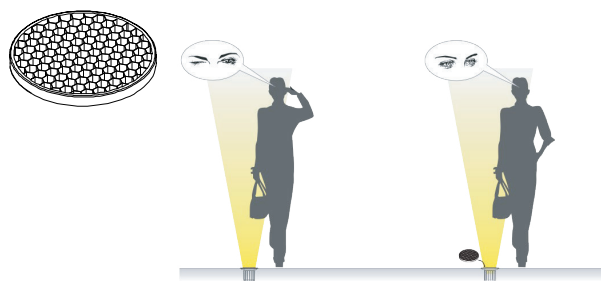

HONEYCOMB LOUVRE EFFECT DEMO

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GKI126R WW	24 (DC)	8	700	3000	>80	24	Stainless steel	8
GKI126S WW	24 (DC)	8	700	3000	>80	24	Stainless steel	8

Specifications above are for reference only and may vary without prior notice