



LPV-20-24

LPV-60-24

LPV-100-24


XLG/150/24V  
ELG/300/24V




**FEATURES**

- Universal AC input
- Primary and secondary sides come with leads
- Built-in Active PFC
- Protections: open-circuit, short-circuit, overload, over-temperature
- Differential mode 4kV and common mode 6kV surge immunity
- SELV (Safety extra low voltage) output

**WIRING DIAGRAM**

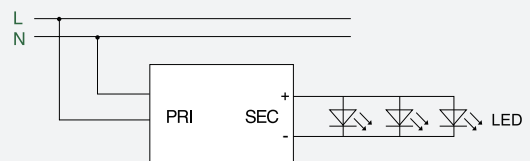

**DIMENSION**

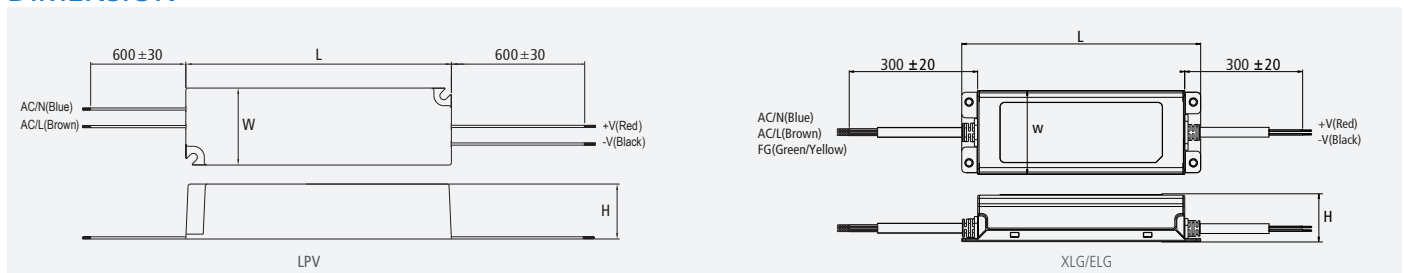

**TECHNICAL SPECIFICATIONS**

MODEL NO.	INPUT VOLTAGE (V)	MAX OUTPUT POWER (W)	OUTPUT VOLTAGE (V)	OUTPUT CURRENT (A)	POWER FACTOR	Ta (°C)	DIMENSIONS (L×W×H) (mm)
LPV-20-24	230	20	24	0-0.84	0.9	-30 to +70	118 x 35 x 26
LPV-60-24	230	60	24	0-2.5	0.9	-30 to +70	162.5 x 42.5 x 32
LPV-100-24	230	100	24	0-4.2	0.9	-30 to +70	190 x 52 x 37
XLG-150-24	230	150	24	3.2-6.25	0.95	-40 to +90	180×63×35.5
ELG-300-24	230	300	24	6.25-12.5	0.93	-40 to +85	246×77×39.5

Specifications above are for reference only and may vary without prior notice