

FIREFOX

FIRE RATED LED DOWNLIGHT

GDL841




FEATURES

- Aluminium Body
- Powder coated finish
- Compact size, delicate design
- Short snoot with precise light direction control
- Constant current LED driver included
- Come with large terminal box
- LED lifespan: 50000hrs @ L90B20, Ta 25°C
- Ta: -20°C to +40°C

OVERVIEW



DIMENSION

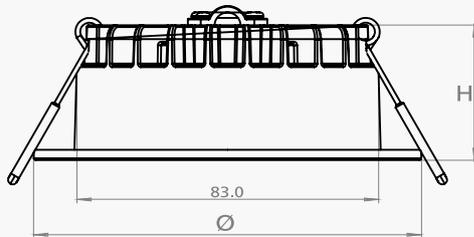

OPTIONS

- DIMMING:
 - Analogue dimming (1~10V)
 - Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL841 TC WH	230	12	900/1000/950	3000/4000/6000	> 80	60	105 x 37	90	White	30
GDL841 TC BK	230	12	900/1000/950	3000/4000/6000	> 80	60	105 x 37	90	Black	30