

GDL922R/923S

COLUMN II

TILTABLE SURFACE MOUNTED LED SPOTLIGHT



GDL922R



GDL923S




FEATURES

- Die-cast aluminium body
- Powder coated finish
- Triac dim LED driver included
- Power factor: 0.9
- Citizen COB LED chips
- Quick-connect terminal for easier installation
- Colour matching 5 MacAdam steps
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -20°C to +45°C

IMAGES



DIMENSIONS

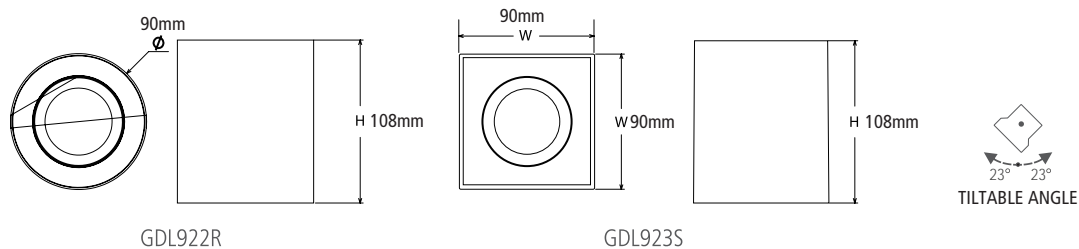

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL922R WW WH	230	10	230	900	3000	>90	36	White	24
GDL922R WW BK								Black	
GDL923S WW WH								White	
GDL923S WW BK								Black	

Specifications above are for reference only and may vary without prior notice