

Bunker II

FRAMELESS LED BULKHEAD

GLW735/6



GLW735




GLW736
PIR SENSOR




FEATURES


- Die-cast aluminium body
- Powder coated finish
- Opal polycarbonate diffuser
- Stainless steel screws
- Moulding shaped silicon gasket
- Constant current LED driver fitted
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -20°C to +45°C

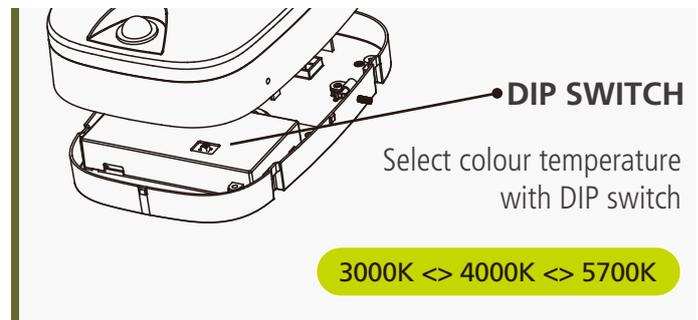

DIMENSION

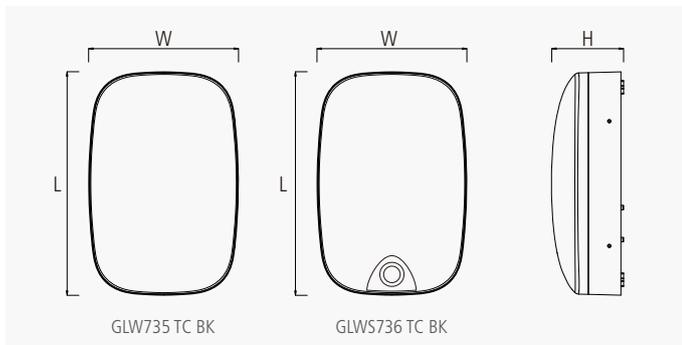

PHOTOMETRIC DATA

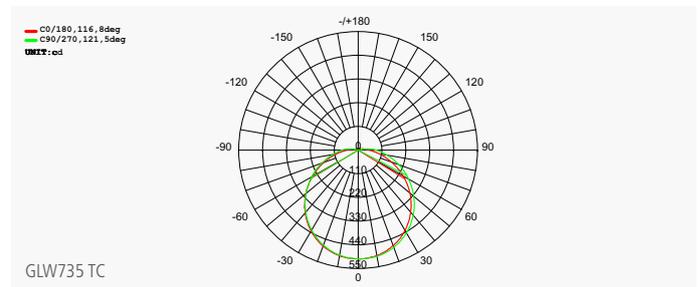

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	CRI	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR	CARTON QUANTITY
GLW735 TC BK	230	18	1800	3000/4000/5700K	120°	>80	251x167x80	Black	12
GLW736 TC BK	230	18	1800	3000/4000/5700K	120°	>80	251x167x80	Black	12

Specifications above are for reference only and may vary without prior notice