

GDL952 MILD

IP65 LOW GLARE LED SPOTLIGHT




FEATURES

- Metal body and metal front cover
- Interchangeable cover
- IP65 front only
- Triac dim LED driver included (not coverable)
- Power factor: 0.9
- Select colour temperature with DIP switch
- LED lifespan: 50000 hours @ L80 B10, Ta 25°C
- Ta: -20°C to +40°C

IMAGES



DIMENSIONS

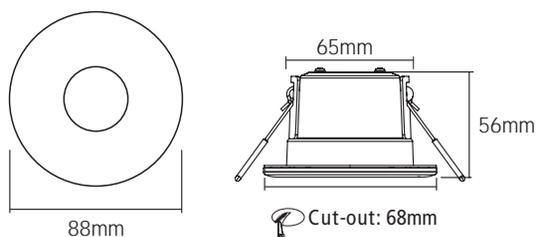

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL952 TC WH	230	7	290	576/603/585	3000/4000/6000	>80	40	White	50
GDL952 TC BK	230	7	290	576/603/585	3000/4000/6000	>80	40	Black	50