

GLW365/6 TC SS

**TAIKO**

IP65 ROUND BULKHEAD WITH PIR SENSOR



GLW365 TC SS



GLW366 TC SS




**FEATURES**

- PC body and ABS frame
- UV stabilised
- Interchangeable frame (white/black)
- Constant current LED driver included
- Power factor: 0.8
- Colour matching 6 MacAdam steps
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -25°C to +45°C

Black frame included



**DIMENSIONS**

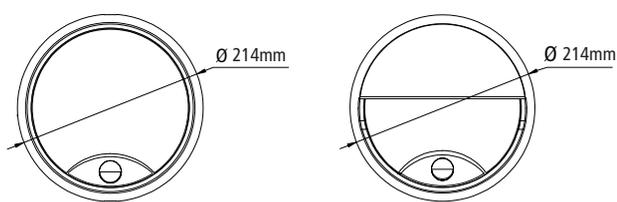


GLW365 TC SS



GLW366 TC SS

**PIR SENSOR**

NO.	Electrical performance	Requirement
1	Installation height	1.8-2.5m
2	Detection degree angle	120°
3	Detection range	8-10m
4	Daylight threshold	0-2000 lux adjustable
5	Hold time	10s-5min adjustable

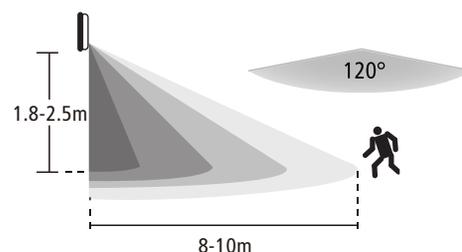

**TECHNICAL SPECIFICATIONS**

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GLW365 TC SS	230	14	800	1400	3000/4000/5700	>80	110	White/Black	24
GLW366 TC SS	230	14	800	700	3000/4000/5700	>80	110	White/Black	20

Specifications above are for reference only and may vary without prior notice