

GLW765/6 SS

STARGEM IV

IP54 WALL MOUNTED SECURITY LIGHT




FEATURES

- Independently adjustable heads
- Die-cast aluminium head
- Polycarbonate base and diffuser
- Infrared motion sensor with override function
- LED lifespan: 50000 hours @ L70, Ta 25°C
- Ta: -20°C to +40°C

IMAGES



DIMENSIONS

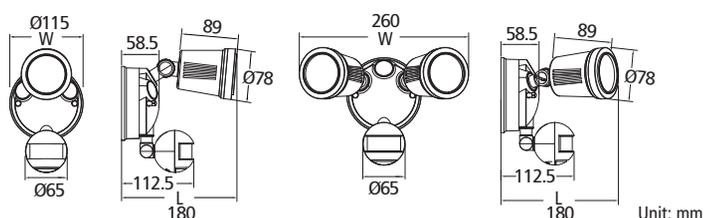

GLW765 TC SS

GLW766 TC SS

Unit: mm

SENSOR SPECIFICATIONS

POWER SOURCE (V)	DETECTION DISTANCE (M)	DETECTION ANGLE (°)	WORKING TEMPERATURE (°C)	WORKING HUMIDITY (RH)
230	Max 12	160 ± 20	-20~+40	<93%RH
TIME SETTING (Sec)	LIGHT CONTROL (lux)	POWER (W)	DETECTION MOTION SPEED (m/s)	INSTALLATION HEIGHT (m)
10sec-7min	<10-2000	0.45(Static:0.1)	0.7-1.5	1.5-3.5

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GLW765 TC WH SS	230	12	960	3000/4000/5700	>80	120	White	16
GLW765 TC BK SS		12	960				Black	16
GLW766 TC WH SS		2×12	2×960				White	12
GLW766 TC BK SS		2×12	2×960				Black	12

Specifications above are for reference only and may vary without prior notice