

# DIMOND GDL304/5/6

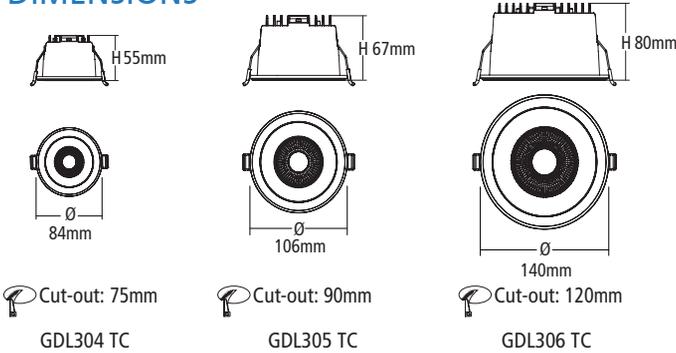
**DEEP FIXED LED DOWNLIGHT**

**FEATURES**

- Polycarbonate body
- Anti-glare design
- Premium aluminium reflector
- Built in triac dimmable LED driver (coverable)
- Power factor: 0.8 (GDL304/5), 0.9 (GDL306)
- Colour matching 3 MacAdam steps
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -25°C to +45°C

**IMAGES**


Wattage adjustable for GDL305/6

**DIMENSIONS**

**OPTIONS**

- BEAM ANGLE: 40°
- BLACK COVER:  
GDL304/BK COVER  
GDL305/BK COVER  
GDL306/BK COVER


**TECHNICAL SPECIFICATIONS**

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL304 TC WB	230	6	80	455/500/495	3000/4000/5700	>90	60	White frame/ black reflector	60
GDL305 TC WB		6/9	80/120	525/567/560(6W) 685/767/740(9W)					60
GDL306 TC WB		9/12	70/90	800/870/860(9W) 1015/1140/1105(12W)					40
GDL304 TC WW		6	80	535/580/560				White frame/ white reflector	60
GDL305 TC WW		6/9	80/120	600/645/640(6W) 790/870/845(9W)					60
GDL306 TC WW		9/12	70/90	910/980/965(9W) 1150/1260/1230(12W)					40

Specifications above are for reference only and may vary without prior notice