

FLUX GTR924


THREE PHASE TRACK LIGHT




FEATURES

- Die-cast aluminium body
- Powder coated finish white (RAL9016), black (RAL9005)
- High transmittance PC lens
- Adjustable beam angle 24°-60° with scale
- Compact flicker-free driver
- Power factor: 0.90
- High efficiency COB LED chips
- Colour matching 3 MacAdam steps
- LED lifespan: 50000 hours @ L70 B50, Ta 25°C
- Ta: -20°C to +45°C

DIMENSIONS



IMAGES

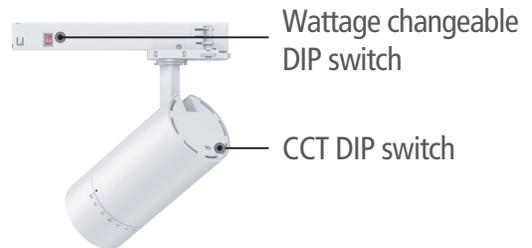

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR
GTR924/20 TC WH	230	10/15/20	220/340/450	24°-10W:1000 / 15W:1550 / 20W:1850	3000/4000/5000	90	24-60	White
GTR924/20 TC BK	230	10/15/20	220/340/450	60°-10W:1000 / 15W:1550 / 20W:2050	3000/4000/5000	90	24-60	Black