

CHICAGO

LOW GLARE LED DOWNLIGHT

GDL985/6




Great choice for single & twin PLC downlight replacement




FEATURES

- Aluminium body
- Powder coated finish
- High transparency prismatic diffuser provide low glare
- Matt aluminium reflector
- LED driver included, pre-wired
- Select colour temperature with DIP switch
- Dual wattage setting with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

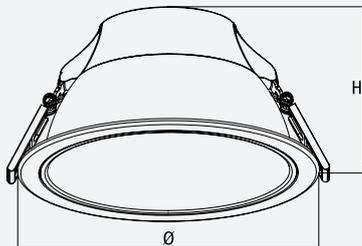

OVERVIEW



Select colour temperature with DIP switch

• **DIP SWITCH**

Dual wattage setting with DIP switch

OPTIONS

- **DIMMING:**
 - Analogue dimming (Trailing edge, 1~10V)
 - Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL985 TC WH	230	23/31	1800/1900/1850 2400/2550/2500	3000/4000/5700	>90	65	225 X 114	195	White	12
GDL986 TC WH	230	28/38	2200/2350/2250 3000/3200/3050	3000/4000/5700	>90	65	275 X 114	240	White	8

Specifications above are for reference only and may vary without prior notice