

GLW535/6 LUMIWAVE

IP65 WALL LIGHT FEATURES A FOUR-SIDED BEAM OUTPUT



GLW535



GLW536



FEATURES


- Die-cast aluminium body
- Polyester powder-coated finish in black
- Clear glass diffuser
- Integrated constant current driver
- Light source:
 - Lumileds 2835 SMD chips (GLW535)
 - OSRAM 2835 SMD chips (GLW536)
- Colour matching 5 MacAdam steps
- LED lifespan: 50000 hours @ L80, Ta 25°C
- Ta: -30°C to +45°C



GLW535

GLW536

DIMENSIONS

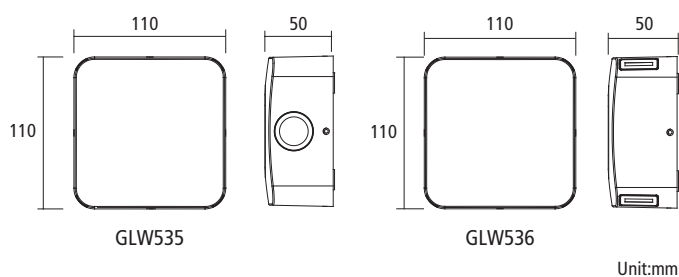


GLW535

GLW536

Unit:mm

PHOTOMETRIC DATA

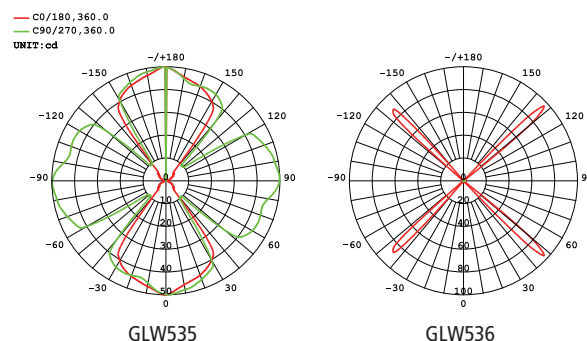

GLW535

GLW536

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GLW535 WW BK	230	4.5	250	3000	>80	73	Matt black	20
GLW536 WW BK	230	5	46	3000	>80	7	Matt black	20

Specifications above are for reference only and may vary without prior notice