

Three Color Temperatures Selectable Led Downlight



PREMIER

S9071TC / S9072TC / S9073TC




S9073TC under CA90 Rating

FEATURES

- Select colour temperature with DIP switch
- Premium grade aluminium body
- Anodized silver or powder coated finish (White)
- Opal acrylic diffuser & High efficiency SMD LED chips
- Trailing edge dimmable LED driver included
- 1.2 m flex & plug fitted
- Available fitting colours: White, Anodized Silver
- 3 colour temperature: Warm White, Cool White, Daylight
- IC-4 Rated (S9073TC under CA90 Rating)
- IP64 weatherproof

Select colour temperature with DIP switch

DIP SWITCH

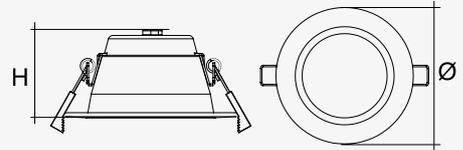

OPTIONS

- 1-10V dimming
- Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI (Ra)	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	CUT OUTSIZE (Ø) (mm)	FITTING COLOUR
S9071TC WH	230	10	800/900/900	3000/4000/5700	>80	90	113 X 57	92	White
S9071TC SL	230	10	800/900/900	3000/4000/5700	>80	90	113 X 57	92	Silver
S9072TC WH	230	14	1000/1150/1150	3000/4000/5700	>80	90	143 X 61	115	White
S9072TC SL	230	14	1000/1150/1150	3000/4000/5700	>80	90	143 X 61	115	Silver
S9073TC WH	230	18	1500/1700/1700	3000/4000/5700	>80	90	165 X 63	140	White
S9073TC SL	230	18	1500/1700/1700	3000/4000/5700	>80	90	165 X 63	140	Silver

Specifications above are for reference only and may vary without prior notice

LIGHT UP THE FUTURE