

OYSTER

G3700

AMENITY LIGHTING



3000K



4200K



6000K





FEATURES

- Surface mounted oyster light
- 3000K, 4200K, 6000K colour temperatures changeable
- Powder coated steel base
- Opal polycarbonate diffuser
- Built-in high efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- Instant start, no flickering
- Long life, average 30,000 hours
- IP20 suitable for indoor use only
- Non-dimmable



Internal switch to set color temperature required

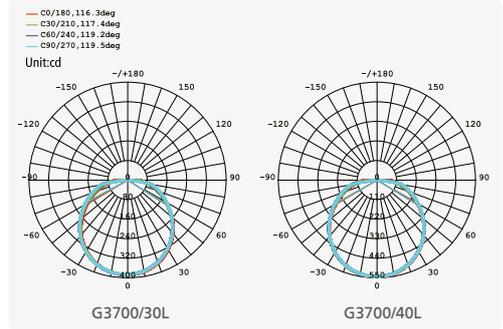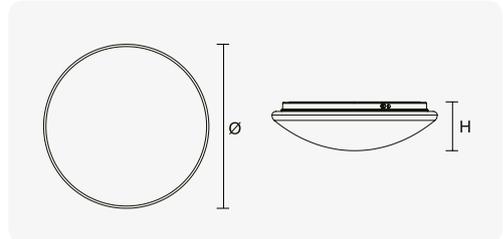

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI (Ra)	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	FITTING COLOUR
G3700/30 TC	230	16	1300	3000/4200/6000	>82	120	300 x 93	White
G3700/40 TC	230	25	1800	3000/4200/6000	>82	120	400 x 122	White

Specifications above are for reference only and may vary without prior notice