

BENNY

SL2106

AMENITY LIGHTING



3000K

4000K

6000K




4000K <---> 6000K <---> 3000K

FEATURES


- Surface mounted oyster light
- 3000K, 4000K, 6000K colour temperatures changeable
- Polycarbonate body
- Double insulation
- Built-in high efficiency SMD LED chips
- Constant current LED driver fitted
- IP65 weatherproof
- Non-dimmable
- IK 08

OPTIONS

- Microwave motion sensor for SL2016/30TC
- Corridor function for SL2106/40TC

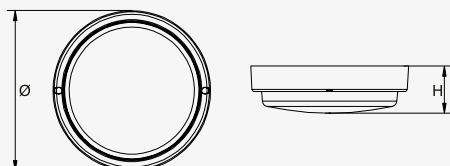

C0/C180: —
C90/C270: —
Unit:cd



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI (Ra)	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	FITTING COLOUR
SL2106/20TC	240	10	900	3000/4000/6000	>80	110	220 x 65	White
SL2106/30TC	240	20	1800	3000/4000/6000	>80	110	280 x 71	White
SL2106/40TC	240	24	2200	3000/4000/6000	>80	110	350 x 81	White

Specifications above are for reference only and may vary without prior notice