

Technical Data Sheet

Product Use

The FH25W-WH/BK is used to quickly heat the area

Typical applications:

- Bathrooms

Environmental Conditions

Operation	to IEC 721-3-3
Climatic conditions	class 3K5
Temperature	0...+50°C
Humidity	<95% r.h.

Standards

Test standards	AS/NZS 60335.2.30:2015 AS/NZS 60335.1:2020 000114
ERAC EMC Compliance	This is a Level One product with an C frame motor that has a very low risk of causing EMC Interference

Minimum Mounting Distances

When choosing a location for the heater the following minimum mounting distances must be observed:

- At least 1800mm from the floor up to the heater
- At least 200mm from the heater to the ceiling
- At least 250mm from any adjacent walls
- At least 700mm from the heater to any objects below it

Ordering

When ordering please give name and type,

Reference	Barcode
FH25W-WH	942000490391-5
FH25W-BK	942000490392-2

Technical Data

Power Supply	230 VAC
Supply Line Fusing	max. 10A
For Solid Wires	2 x 1.5mm ²
Motor	230-240VAC 50Hz 0.3Amp
Motor Insulation Class	B1
Motor Protection	Thermally Protected
Total Product Wattage	2200-2400Watts
Installed DB rating at 1.5m	45DB

Technical Data Sheet








FH25W-WH / BK

Wall Mounted Fan Heater

Stainless Steel or Black Satin Finish

Dimensions

Length	310mm
Height	196mm

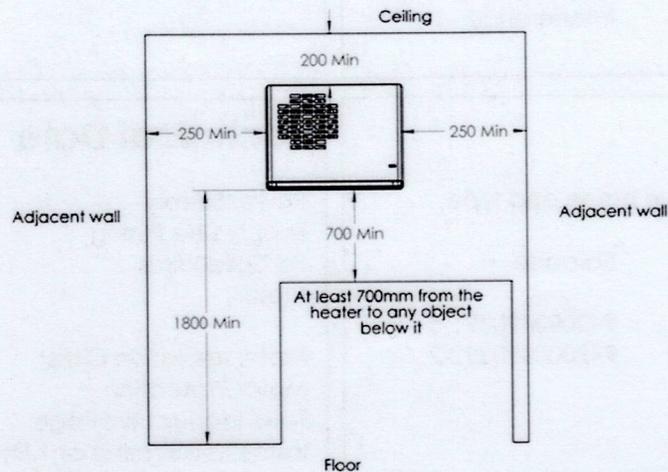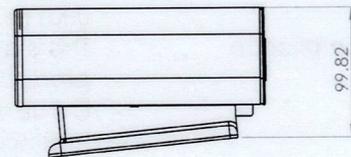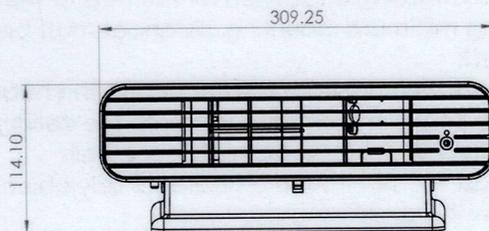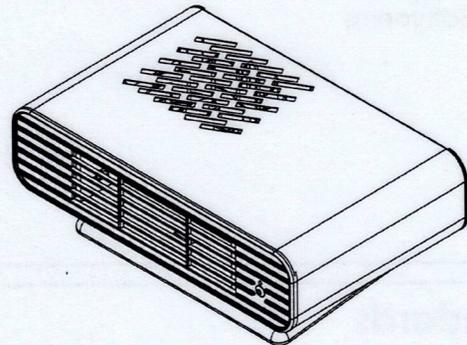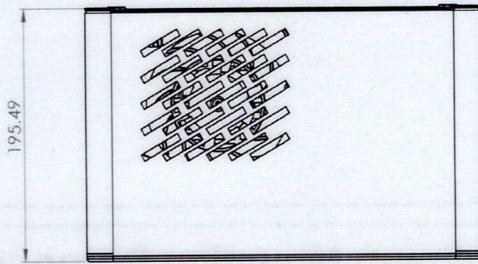

Specifications

Weight	1.96kg
Colour	Stainless Steel
Housing material	Stainless Steel, Poly Carb

Approval

SAA

Features

- Easy to install
- Powerful fan motor
- 3 safety cutouts
- All parts are included
- 5 year unit warranty