


Alco

Pre-Insulated Terminals

FEATURES:

- Pre-insulated double crimp terminals
- Three piece construction
- Colour-coded PVC insulation for easy identification
- Easy entry
- 600V max
- Operating temperature: +105°C

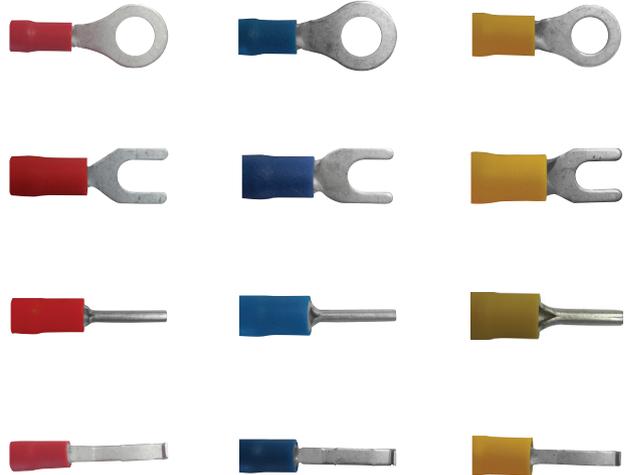

SPECIFICATIONS:

| RED | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (0.5-1.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| RING TERMINALS | | | | | | | | | |
| ALCRR3.7/100 | | 3.7 | 100 | • | • | • | • | • | • |
| ALCRR4/100 | | 4 | 100 | • | • | • | • | • | • |
| ALCRR5/100 | | 5 | 100 | • | • | • | • | • | • |
| ALCRR6/100 | | 6 | 100 | • | • | • | • | • | • |
| ALCRR8/100 | | 8 | 100 | • | • | • | • | • | • |
| ALCRR10/100 | | 10 | 100 | • | • | • | • | • | • |

| BLUE | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (1.5-2.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| RING TERMINALS | | | | | | | | | |
| ALCRB3.7/100 | | 3.7 | 100 | • | • | • | • | • | • |
| ALCRB4/100 | | 4 | 100 | • | • | • | • | • | • |
| ALCRB5/100 | | 5 | 100 | • | • | • | • | • | • |
| ALCRB6/100 | | 6 | 100 | • | • | • | • | • | • |
| ALCRB8/100 | | 8 | 100 | • | • | • | • | • | • |
| ALCRB10/100 | | 10 | 100 | • | • | • | • | • | • |

| YELLOW | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (4.0-6.0MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| RING TERMINALS | | | | | | | | | |
| ALCRY3.7/50 | | 3.7 | 50 | • | • | • | • | • | • |
| ALCRY4/50 | | 4 | 50 | • | • | • | • | • | • |
| ALCRY5/50 | | 5 | 50 | • | • | • | • | • | • |
| ALCRY6/50 | | 6 | 50 | • | • | • | • | • | • |
| ALCRY8/50 | | 8 | 50 | • | • | • | • | • | • |
| ALCRY10/50 | | 10 | 50 | • | • | • | • | • | • |
| ALCRY12/50 | | 12 | 50 | • | • | • | • | • | • |

| RED | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (0.5-1.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| FORK TERMINALS | | | | | | | | | |
| ALCFR3.7/100 | | 3.7 | 100 | • | • | • | • | • | • |
| ALCFR4/100 | | 4 | 100 | • | • | • | • | • | • |
| ALCFR5/100 | | 5 | 100 | • | • | • | • | • | • |
| ALCFR6/100 | | 6 | 100 | • | • | • | • | • | • |

| BLUE | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (1.5-2.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| FORK TERMINALS | | | | | | | | | |
| ALCFB3.7/100 | | 3.7 | 100 | • | • | • | • | • | • |
| ALCFB4/100 | | 4 | 100 | • | • | • | • | • | • |
| ALCFB5/100 | | 5 | 100 | • | • | • | • | • | • |
| ALCFB6/100 | | 6 | 100 | • | • | • | • | • | • |

| YELLOW | | | | | | | | | |
|-----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (4.0-6.0MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| FORK TERMINALS | | | | | | | | | |
| ALCFY3.7/50 | | 3.7 | 50 | • | • | • | • | • | • |
| ALCFY4/50 | | 4 | 50 | • | • | • | • | • | • |
| ALCFY5/50 | | 5 | 50 | • | • | • | • | • | • |
| ALCFY6/50 | | 6 | 50 | • | • | • | • | • | • |
| ALCFY8/50 | | 8 | 50 | • | • | • | • | • | • |

| RED | | | | | | | | | |
|----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (0.5-1.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| PIN TERMINALS | | | | | | | | | |
| ALCPNR/100 | | 1.9 | 100 | • | • | • | • | • | • |
| LIP BLADES | | | | | | | | | |
| ALCLTR/100 | | 3.0 | 100 | • | • | • | • | • | • |

| BLUE | | | | | | | | | |
|----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (1.5-2.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| PIN TERMINALS | | | | | | | | | |
| ALCPNB/100 | | 1.9 | 100 | • | • | • | • | • | • |
| LIP BLADES | | | | | | | | | |
| ALCLTB/100 | | 3.0 | 100 | • | • | • | • | • | • |

| YELLOW | | | | | | | | | |
|----------------------|--|----------------|----------|------------------------|----------|----------|----------|----------|----------|
| PART NUMBER | CONDUCTOR SIZE (4.0-6.0MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WATK007 | WATN100C | WATN100D | WATN100E | WATN100F | WATN100G |
| PIN TERMINALS | | | | | | | | | |
| ALCPNY/50 | | 1.9 | 50 | • | • | • | • | • | • |
| LIP BLADES | | | | | | | | | |
| ALCLTY/50 | | 3.0 | 50 | • | • | • | • | • | • |

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au

Alco

Pre-Insulated Terminals

FEATURES:

- Pre-insulated double crimp terminals
- Three piece construction
- Colour-coded PVC insulation for easy identification
- Easy entry
- 300V max
- Operating temperature: +105°C



SPECIFICATIONS:

| RED | | | | | | | | | |
|---------------------------|--|-----------------|----------|------------------------|-----------|-----------|-----------|-----------|-----------|
| PART NUMBER | CONDUCTOR SIZE (0.5-1.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WAKK02 | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V |
| BULLET RECEPTACLES | | BULLET DIA (MM) | | | | | | | |
| ALCBRR/100 | | 4.0 | 100 | • | • | • | • | • | • |

| BULLET TERMINALS | | BULLET DIA (MM) | | | | | | | |
|-------------------------|--|-----------------|-----|---|---|---|---|---|---|
| ALCBTR/100 | | 4.0 | 100 | • | • | • | • | • | • |

| QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--------------------------|--|------------|-----|---|---|---|---|---|---|
| ALCFQDR/100 | | 6.35 | 100 | • | • | • | • | • | • |

| FULLY INSULATED QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--|--|------------|----|---|---|---|---|---|---|
| ALCFIQDR/50 | | 6.35 | 50 | • | • | • | • | • | • |

| TAB DISCONNECTS | | TAB WIDTH (MM) | | | | | | | |
|------------------------|--|----------------|-----|---|---|---|---|---|---|
| ALCMDTABR/100 | | 6.35 | 100 | • | • | • | • | • | • |

| PIGGY BACK TERMINALS | | WIDTH (MM) | | | | | | | |
|-----------------------------|--|------------|----|---|---|---|---|---|---|
| ALCPBR/50 | | 6.35 | 50 | • | • | • | • | • | • |

| FLAT BLADE TERMINALS | | BLADE LENGTH (MM) | | | | | | | |
|-----------------------------|--|-------------------|-----|---|---|---|---|---|---|
| ALCFBTR10/100 | | 10 | 100 | • | • | • | • | • | • |
| ALCFBTR18/100 | | 18 | 100 | • | • | • | • | • | • |

| BLUE | | | | | | | | | |
|---------------------------|--|-----------------|----------|------------------------|-----------|-----------|-----------|-----------|-----------|
| PART NUMBER | CONDUCTOR SIZE (1.5-2.5MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WAKK02 | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V |
| BULLET RECEPTACLES | | BULLET DIA (MM) | | | | | | | |
| ALCBRB/100 | | 4.0 | 100 | • | • | • | • | • | • |
| ALCBRB5/100 | | 5.0 | 100 | • | • | • | • | • | • |

| BULLET TERMINALS | | BULLET DIA (MM) | | | | | | | |
|-------------------------|--|-----------------|-----|---|---|---|---|---|---|
| ALCBTB/100 | | 4.0 | 100 | • | • | • | • | • | • |
| ALCBTB5/100 | | 5.0 | 100 | • | • | • | • | • | • |

| QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--------------------------|--|------------|-----|---|---|---|---|---|---|
| ALCFQDB/100 | | 6.35 | 100 | • | • | • | • | • | • |

| FULLY INSULATED QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--|--|------------|----|---|---|---|---|---|---|
| ALCFIQDB/50 | | 6.35 | 50 | • | • | • | • | • | • |

| TAB DISCONNECTS | | TAB WIDTH (MM) | | | | | | | |
|------------------------|--|----------------|-----|---|---|---|---|---|---|
| ALCMDTABB/100 | | 6.35 | 100 | • | • | • | • | • | • |

| PIGGY BACK TERMINALS | | WIDTH (MM) | | | | | | | |
|-----------------------------|--|------------|----|---|---|---|---|---|---|
| ALCPBB/50 | | 6.35 | 50 | • | • | • | • | • | • |

| FLAT BLADE TERMINALS | | BLADE LENGTH (MM) | | | | | | | |
|-----------------------------|--|-------------------|-----|---|---|---|---|---|---|
| ALCFBTB10/100 | | 10 | 100 | • | • | • | • | • | • |
| ALCFBTB18/100 | | 18 | 100 | • | • | • | • | • | • |

| YELLOW | | | | | | | | | |
|---------------------------|--|-----------------|----------|------------------------|-----------|-----------|-----------|-----------|-----------|
| PART NUMBER | CONDUCTOR SIZE (4.0-6.0MM ²) | STUD SIZE (MM) | PACK QTY | SUITABLE CRIMPING TOOL | | | | | |
| | | | | WAKK02 | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V | WAKM0100V |
| BULLET RECEPTACLES | | BULLET DIA (MM) | | | | | | | |
| ALCBRY/50 | | 5.0 | 50 | • | • | • | • | • | • |

| BULLET TERMINALS | | BULLET DIA (MM) | | | | | | | |
|-------------------------|--|-----------------|----|---|---|---|---|---|---|
| ALCBTY/50 | | 5.0 | 50 | • | • | • | • | • | • |

| QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--------------------------|--|------------|----|---|---|---|---|---|---|
| ALCFQDY/50 | | 6.35 | 50 | • | • | • | • | • | • |

| FULLY INSULATED QUICK DISCONNECTS | | WIDTH (MM) | | | | | | | |
|--|--|------------|----|---|---|---|---|---|---|
| ALCFIQDY/50 | | 6.35 | 50 | • | • | • | • | • | • |

| TAB DISCONNECTS | | TAB WIDTH (MM) | | | | | | | |
|------------------------|--|----------------|----|---|---|---|---|---|---|
| ALCMDTABY/100 | | 6.35 | 50 | • | • | • | • | • | • |

| PIGGY BACK TERMINALS | | WIDTH (MM) | | | | | | | |
|-----------------------------|--|------------|----|---|---|---|---|---|---|
| ALCPBY/100 | | 6.35 | 50 | • | • | • | • | • | • |

| FLAT BLADE TERMINALS | | BLADE LENGTH (MM) | | | | | | | |
|-----------------------------|--|-------------------|----|---|---|---|---|---|---|
| ALCFBTY10/50 | | 10 | 50 | • | • | • | • | • | • |
| ALCFBTY18/50 | | 18 | 50 | • | • | • | • | • | • |

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au